

RAL 7016


FINGER-S


09332

Minimal Bollard Lighting

Finger-S offers an aesthetic and functional lighting solution for parks, walkways, gardens, landscaped areas, and building surroundings with its modern architectural lines and compact housing. Thanks to its symmetrical and asymmetrical optical options, it provides light distribution suitable for different application needs, creating safe and visually comfortable outdoor spaces.

With its corrosion-resistant aluminum housing, IP65 protection class, and IK08 impact resistance, offers long-lasting performance in challenging outdoor conditions, combining simple design with high durability and reliable lighting performance.

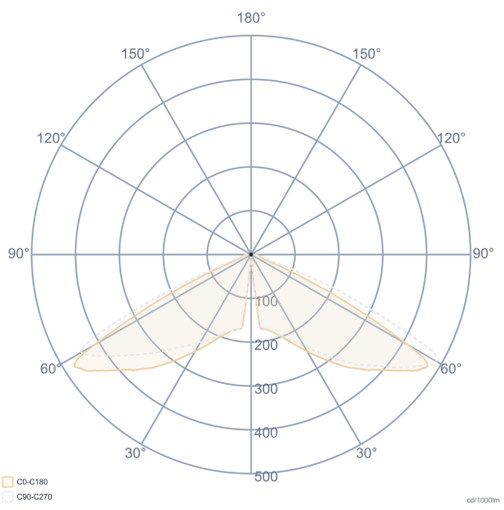



General Information	
Housing	Corrosion Resistant Cast Aluminum
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	150(W) x 300(L) x 150(H)
Mounting Type	Surface

Electrical Info	
Power	10W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-30°C / +60°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	2x25°
UGR Value	UGR ≤ 25
CRI [Ra]	CRI ≥ 70
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxLxH (mm)	L (mm)
09332.16.50.009	10	800	5000	150x150x300	600

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com