

RAL 9005


PANORAMIC-B


09334

Decorative Bollard Lighting Fixture

Panoramic-B is a decorative bollard lighting fixture designed for modern outdoor applications, combining aesthetics with high performance. Its corrosion-resistant aluminum housing, electrostatically powder-coated surface, and UV-resistant PMMA lens structure ensure long-lasting and reliable use even in challenging outdoor conditions.

With symmetrical and asymmetrical optical options, it provides controlled and homogeneous light distribution in walkways, landscaped areas, parks, gardens, and building surroundings. Its IP65 protection class and IK08 impact resistance demonstrate high durability against outdoor conditions, while its simple design, which harmonizes with modern architecture, adds an aesthetic touch to projects.

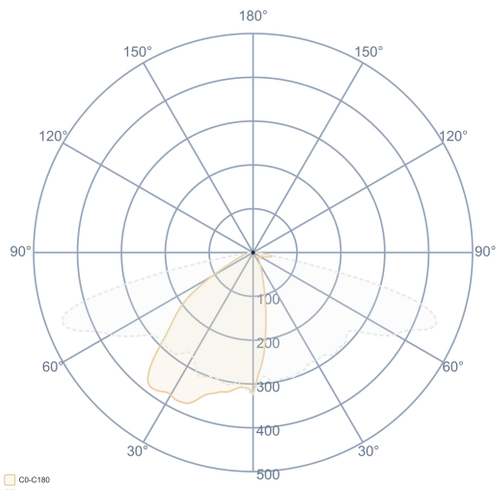

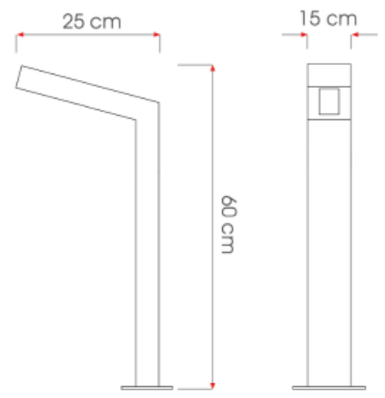

General Information	
Housing	Corrosion Resistant Cast Aluminum
Paint	Electrostatic Powder Paint
Optics	PMMA Lens
Insulation Class	Class I
Product Dimensions [mm]	250(W) x 600(L) x 150(H)
Mounting Type	Surface

Electrical Info	
Power	14-22W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-30°C / +60°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	1x25°
UGR Value	UGR ≤ 25
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxHxL (mm)
09334.26.60.018	14	1760	6000	250x600x150
09334.26.60.028	22	2770	6000	250x600x150

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com