

RAL 9005


PANORAMIC-S


09492

A Modern Touch to Outdoor Spaces

Panoramic-S is a modern architectural, decorative outdoor lighting fixture. Its slim and elegant body design, combined with high-performance LED technology, offers an aesthetic and functional lighting solution for walkways, landscaped areas, parks, and commercial environments.

Thanks to its corrosion-resistant aluminum housing, electrostatic powder coating, and UV-resistant optics, it ensures long-lasting use even in challenging outdoor conditions. With various power and length options, Panoramic-S easily adapts to diverse project needs, adding value to outdoor spaces with its minimalist design that harmonizes with contemporary architecture.

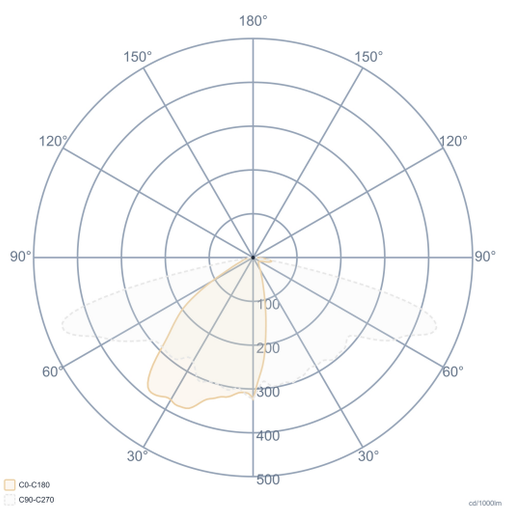

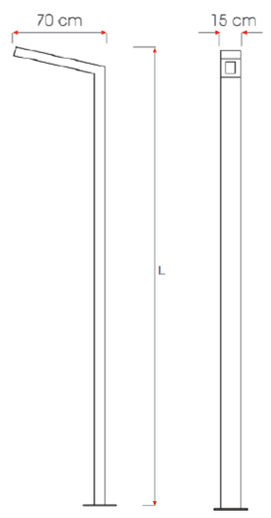

General Information	
Housing	Corrosion Resistant Aluminum
Paint	Electrostatic Powder Paint
Optics	PMMA Lens
Insulation Class	Class I
Product Dimensions [mm]	700x150mm
Insulation Class	Class I
Mounting Type	Sıva Üstü

Electrical Info	
Power	40-90W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-30°C / +60°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	25°
UGR Value	UGR ≤ 25
CRI [Ra]	CRI ≥ 70
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	L (mm)
09492.73.60.036	1x40	3525	6000	3000
09492.74.60.075	1x60	7300	6000	4200
09492.74.60.110	1x75	10700	6000	4200
09492.74.60.150	1x90	14620	6000	6000

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com