

Panoramic-S

Outdoor Lighting - Urban Lighting



TECHNICAL INFORMATION

Housing Corrosion Resistant Aluminum
Paint Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 25°
UGR Value UGR ≤ 25
CRI CRI ≥ 70
Color Bin Value Mc Adams ≤ 3




ELECTRICAL

Power (W) 40-90W
Power Factor >0.95
Light Source High Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -30°C / +60°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- Tunable White
- 2700K ~ 6500K
- Different RAL Color Options
- Class-I Protection Class
- 1-10V DIM
- Emergency Lighting Unit
- CRI > 90
- Plug-in Connector
- AC-DC Supply(MBS)

ASSEMBLY

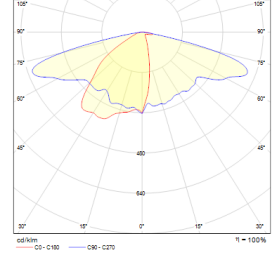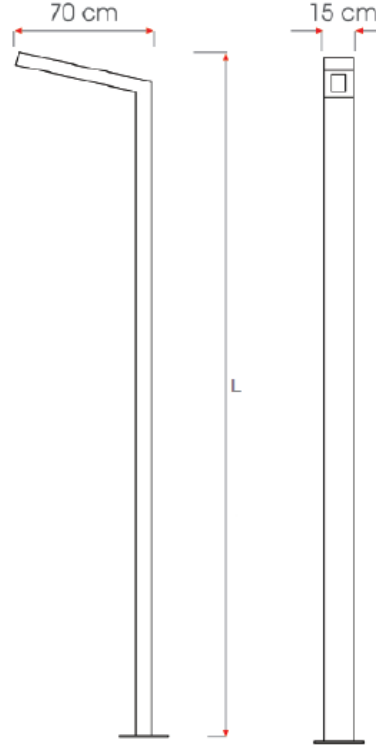

| Order Code | W | Lm | CCT | CRI | L (mm) |
|-----------------|------|-------|------|-------|--------|
| 09492.73.60.036 | 1x40 | 3525 | 6000 | Ra>70 | 3000 |
| 09492.74.60.075 | 1x60 | 7300 | 6000 | Ra>70 | 4200 |
| 09492.74.60.110 | 1x75 | 10700 | 6000 | Ra>70 | 4200 |
| 09492.74.60.150 | 1x90 | 14620 | 6000 | Ra>70 | 6000 |

