

# Point

Outdoor Lighting - Facade Lighting



## Colour Options



Ral 7016

## TECHNICAL INFORMATION

|                  |                            |
|------------------|----------------------------|
| <b>Housing</b>   | Extruded Aluminum Profile  |
| <b>Frame</b>     | Matte Anodized Finish      |
| <b>Glass</b>     | Tempered Clear Glass       |
| <b>Reflector</b> | Acrylic Optical Lens       |
| <b>Paint</b>     | Electrostatic Powder Paint |

## OPTICAL SPECIFICATIONS

|                           |                            |
|---------------------------|----------------------------|
| <b>Optics</b>             | Symmetrical / Asymmetrical |
| <b>Light Output Angle</b> | 15°-30°-45°-60°-90°-120°   |
| <b>UGR Value</b>          | UGR ≤ 25                   |
| <b>CRI</b>                | CRI ≥ 70                   |
| <b>Color Bin Value</b>    | Mc Adams ≤ 3               |




## ELECTRICAL

|                            |   |
|----------------------------|---|
| <b>Power (W)</b>           | 40W                                     |
| <b>Power Factor</b>        | >0.95                                   |
| <b>Light Source</b>        | Power LED                               |
| <b>Cabling</b>             | Halogen-Free                            |
| <b>Input Voltage</b>       | 220-240V AC / 50-60 Hz                  |
| <b>LED Driver</b>          | High Efficiency Constant Current Output |
| <b>Ambient Temperature</b> | -40°C / +60°C                           |
| <b>LED Lifetime L80B50</b> | >50.000 Hour                            |

## OPTIONAL

|                               |                           |
|-------------------------------|---------------------------|
| - DALI                        | - 1-10V DIM               |
| - Tunable White               | - Emergency Lighting Unit |
| - 2700K ~ 6500K               | - CRI > 90                |
| - Different RAL Color Options | - Plug-in Connector       |
| - Class-I Protection Class    | - AC-DC Supply(MBS)       |

## ASSEMBLY

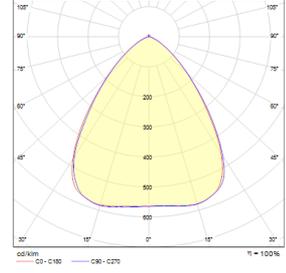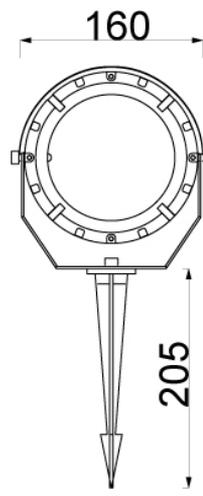

| Order Code      | W  | Lm   | CCT  | CRI   | ØxWxH (mm)        | Angle | Kg   |
|-----------------|----|------|------|-------|-------------------|-------|------|
| 09397.11.60.016 | 13 | 1600 | 6000 | Ra>70 | Ø160x80x1<br>85mm | 60°   | 1,15 |
| 09397.11.60.026 | 20 | 2600 | 6000 | Ra>70 | Ø160x80x1<br>85mm | 60°   | 1,15 |
| 09397.11.60.036 | 28 | 3600 | 6000 | Ra>70 | Ø160x80x1<br>85mm | 60°   | 1,15 |
| 09397.11.60.052 | 40 | 5200 | 6000 | Ra>70 | Ø160x80x1<br>85mm | 60°   | 1,15 |

