


Point

Outdoor Lighting - Facade Lighting

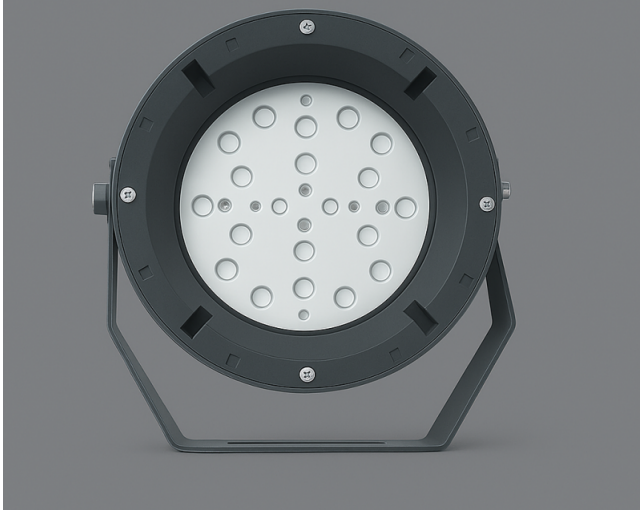

TECHNICAL INFORMATION

Housing	Extruded Aluminum Profile
Frame	Matte Anodized Finish
Glass	Tempered Clear Glass
Reflector	Acrylic Optical Lens
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical / Asymmetrical
Light Output Angle	15°-30°-45°-60°-90°-120°
UGR Value	UGR ≤ 25
CRI	CRI ≥ 70
Color Bin Value	Mc Adams ≤ 3



ELECTRICAL

Power (W)	40W
Power Factor	>0.95
Light Source	Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-40°C / +60°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- 2700K ~ 6500K	- CRI > 90
- Different RAL Color Options	- Plug-in Connector
- Class-I Protection Class	- AC-DC Supply(MBS)

ASSEMBLY

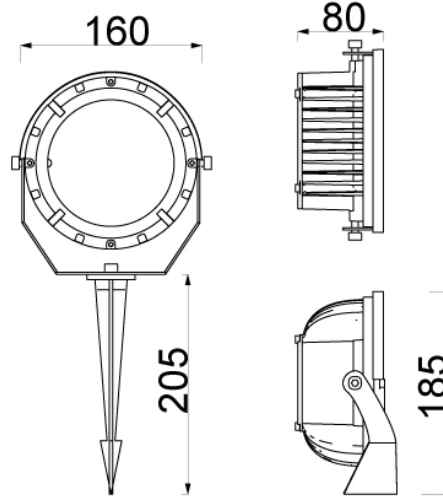

Order Code	W	Lm	CCT	CRI	ØxWxH (mm)	Angle	Kg
09397.11.60.016	13	1600	6000	Ra>70	Ø160x80x185mm	60°	1,15

