



TRIGON

09493

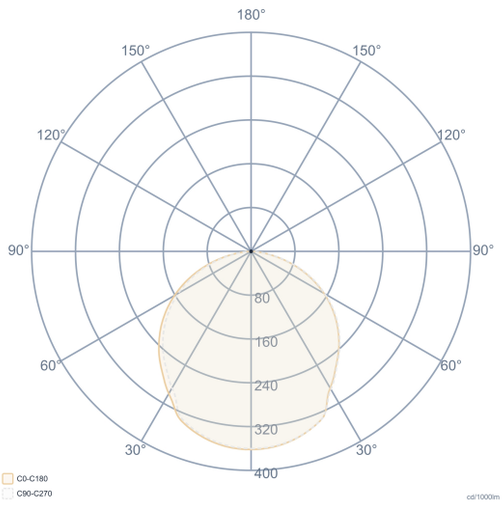

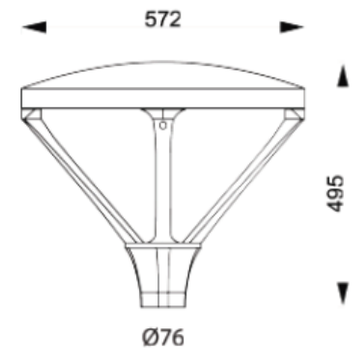

General Information		Electrical Info		Lighting Technology	
Housing	Corrosion Resistant Aluminum	**Power**	40-90W	**Light Output Angle**	120°
Frame	Aluminum Injection	**Power Factor**	>0.95	**UGR Value**	UGR ≤ 25
Glass	Tempered Transparent	**Light Source**	High Power LED	**CRI [Ra]**	CRI ≥ 80
Optics	Optical Lens	**Cabling**	Halogen-Free	**Color Bin Value**	Mc Adams ≤ 3
Paint	Electrostatic Powder Paint	**Input Voltage**	220-240V AC / 50-60 Hz		
Insulation Class	Class I	**LED Driver**	Constant Current		
Product Dimensions [mm]	∅76x572(W)x495(H)	**Ambient Temperature**	-30°C / +60°C		
Mounting Type	Surface	**LED Lifetime L70**	>102.000 Hour		

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	L (mm)
09493.54.60.053	40	5080	6000	4000
09493.55.60.107	75	10900	6000	5000
09493.56.60.145	90	13890	6000	6000

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com