
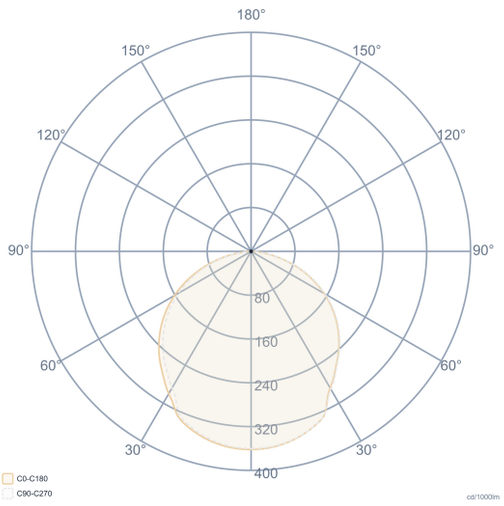


# TRIGON

## 09493

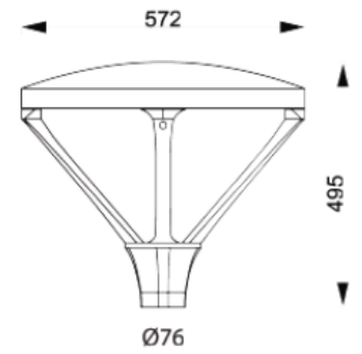


| General Information | | Electrical Info | | Lighting Technology | |
|---|---|---|---|---|---|
| **Housing** | Corrosion Resistant Aluminum | **Power** | 40-90W | **Light Output Angle** | 120° |
| **Frame** | Aluminum Injection | **Power Factor** | >0.95 | **UGR Value** | UGR ≤ 25 |
| **Glass** | Tempered Transparent | **Light Source** | High Power LED | **CRI [Ra]** | CRI ≥ 80 |
| **Optics** | Optical Lens | **Cabling** | Halogen-Free | **Color Bin Value** | Mc Adams ≤ 3 |
| **Paint** | Electrostatic Powder Paint | **Input Voltage** | 220-240V AC / 50-60 Hz | | |
| **Insulation Class** | Class I | **LED Driver** | Constant Current | | |
| **Product Dimensions [mm]** | ∅76x572(W)x495(H) | **Ambient Temperature** | -30°C / +60°C | | |
| **Mounting Type** | Surface | **LED Lifetime L70** | >102.000 Hour | | |

| Optional |
|---|
| DALI / 1-10V |
| CRI>90 , 2700K~6500K , Tunable White |
| Emergency Lighting Unit |

| Order Code | W | Lm | CCT | L (mm) |
|---|---|---|---|---|
| 09493.54.60.053 | 40 | 5080 | 6000 | 4000 |
| 09493.55.60.107 | 75 | 10900 | 6000 | 5000 |
| 09493.56.60.145 | 90 | 13890 | 6000 | 6000 |

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.



+90 (216) 397 22 16
info@ikizleraydinlatma.com