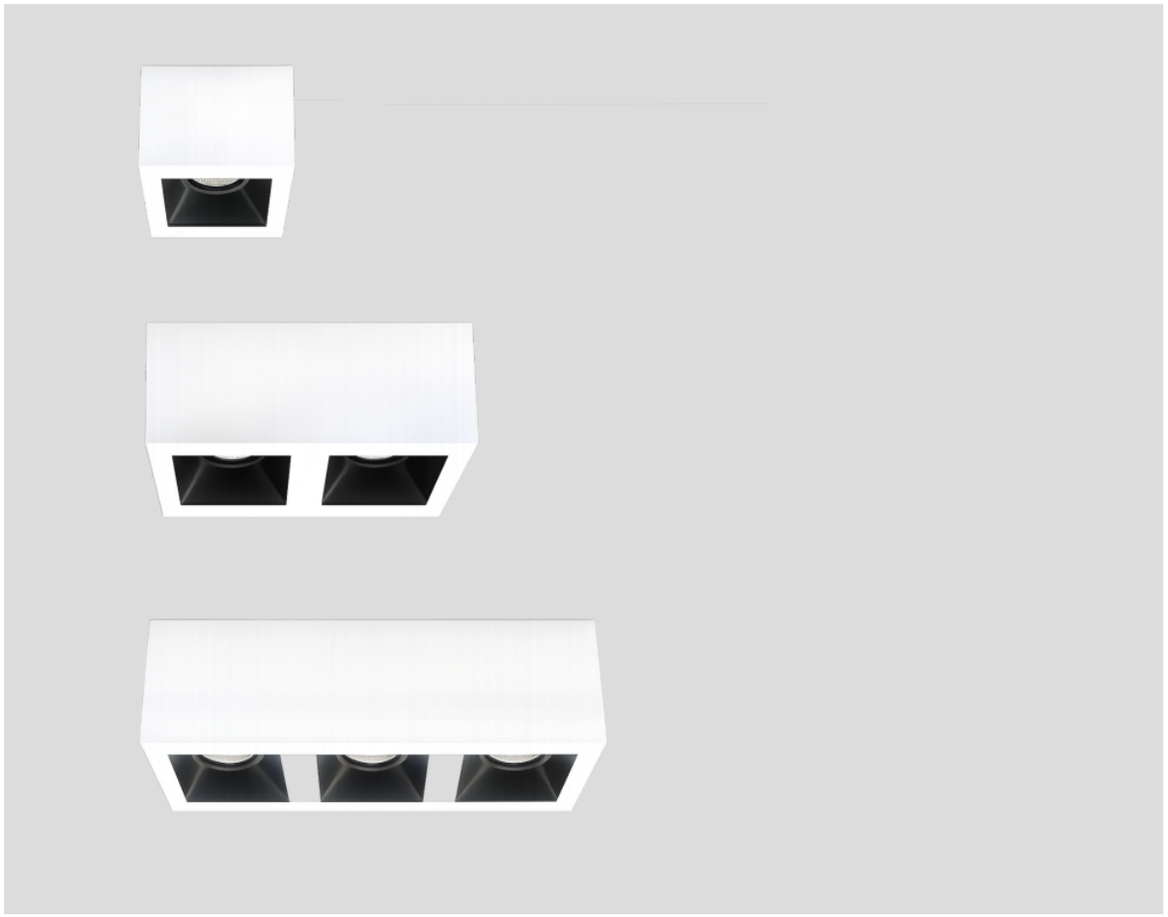


# PERLA-SK

# 05480


## Modular Square Surface Mounted Spot Light Luminaire

The PERLA-SK Series is a professional surface-mounted spotlight solution developed for architectural projects, featuring a square-shaped, deep reflector structure and an optical design that provides low glare. Its modern formula, distinctly separated from the ceiling, offers controlled and comfortable lighting while giving the space a strong architectural character.

With single, double, and triple module options (SK1, SK2, and SK3), it provides flexible lighting solutions. Thanks to its modular structure, different light distributions and spatial arrangements can be created while maintaining the same design language.

Available in white and black body alternatives, the PERLA-SK Series adapts to different architectural concepts and can be used in shops, offices, galleries, social areas, and commercial projects for both general and accent lighting applications.

RAL 9016 RAL 9005 RAL 9006

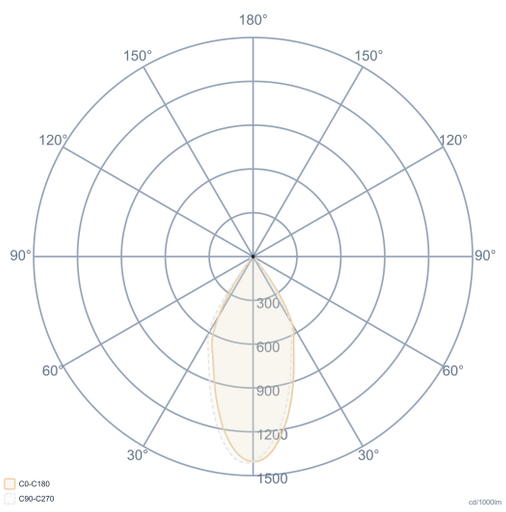





| General Information | |
|---|---|
| **Housing** | Aluminum Injection |
| **Frame** | DKP Metal Sheet |
| **Optics** | Polished Reflector |
| **Paint** | Electrostatic Powder Coating |
| **Insulation Class** | Class II |
| **Product Dimensions [mm]** | 100(W)x100/200/310(W)x130(H) |
| **Mounting Type** | Surface |
| **Mounting Part** | Screw Dowel Set |

| Electrical Info | |
|---|---|
| **Power** | 11-33W |
| **Power Factor** | >0.95 |
| **Light Source** | COB LED |
| **Cabling** | Halojen-Free |
| **Input Voltage** | 220-240V AC / 50-60 Hz |
| **LED Driver** | Constant Current |
| **Ambient Temperature** | -20°C / +50°C |
| **LED Lifetime L70** | >60.000 Hour |

| Lighting Technology | |
|---|---|
| **Light Output Angle** | 35° |
| **UGR Value** | UGR ≤ 22 |
| **CRI [Ra]** | CRI ≥ 80 |
| **Color Bin Value** | Mc Adams ≤ 3 |

| Optional |
|---|
| DALI / 1-10V |
| CRI>90 , 2700K~6500K , Tunable White |
| Emergency Lighting Kit |

| Order Code | W | Lm | Angle | CCT | WxLxH (mm) | Product Type | Kg |
|---|---|---|---|---|---|---|---|
| 05480.11.30.007 | 11 | 1020 | 35° | 3000 | 100x100x130 | SK1 | 1,20 |
| 05480.11.40.007 | 11 | 1100 | 35° | 4000 | 100x100x130 | SK1 | 1,20 |
| 05480.11.30.020 | 22 | 2050 | 35° | 3000 | 100x200x130 | SK2 | 1,80 |
| 05480.11.40.021 | 22 | 2150 | 35° | 4000 | 100x200x130 | SK2 | 1,80 |
| 05480.11.30.021 | 33 | 3050 | 35° | 3000 | 100x310x130 | SK3 | 2,40 |
| 05480.11.40.023 | 33 | 3200 | 35° | 4000 | 100x310x130 | SK3 | 2,40 |

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.



+90 (216) 397 22 16
info@ikizleraydinlatma.com