

SILVERLINE


02174


Slim Panel Luminaire with Bright Optics

Silverline offers efficient and comfortable lighting in modern workspaces with its high-efficiency silver reflector optical structure. Thanks to its special reflector design, light is directed in a controlled manner, while high optical efficiency ensures homogeneous and balanced lighting in spaces.

Its 60x60 cm recessed structure seamlessly integrates with modular ceiling systems, creating a simple and integrated look on the ceiling. Its metal sheet body and minimalist design add a modern character to architectural projects.

RAL 9016 RAL 9005 RAL 9006

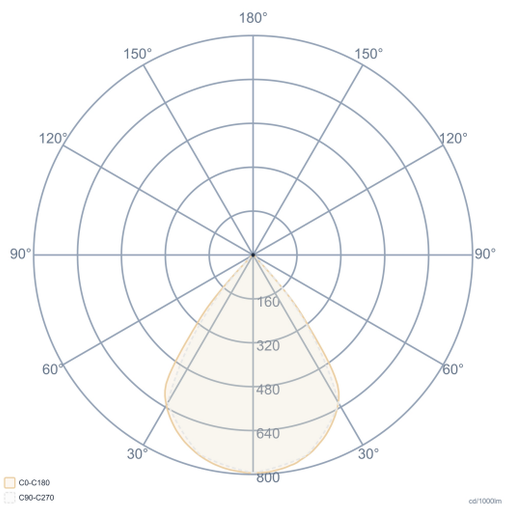

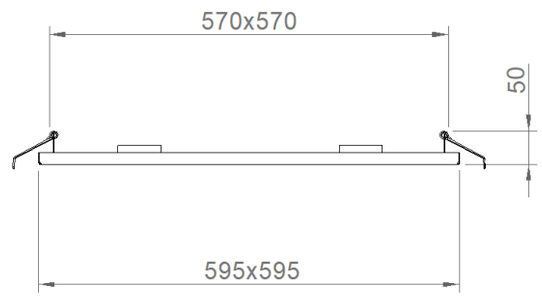

General Information		Electrical Info		Lighting Technology	
Profile Body	Aluminum Extruded	**Power**	27W	**Light Output Angle**	80°
Body & Frame	DKP Metal Sheet	**Power Factor**	>0.95	**UGR Value**	UGR ≤ 17
Optics	Polished Reflector	**Light Source**	SMD Mid Power LED	**CRI [Ra]**	CRI ≥ 80
Paint	Electrostatic Powder Paint	**Cabling**	Halogen-Free	**Color Bin Value**	Mc Adams ≤ 3
Insulation Class	Class I	**Input Voltage**	220-240V AC / 50-60 Hz		
Product Dimensions [mm]	595(W) x 595(L) x 50(H)	**LED Driver**	Constant Current		
Mounting Type	Recessed	**Ambient Temperature**	-20°C / +50°C		
Mounting Part	Steel Spring	**LED Lifetime L70**	>102.000 Hour		

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	Angle	CCT	WxHxL (mm)	Ceiling Cutting (mm)	Kg
02174.66.30.029	27	3654	80°	3000	595x595x50	570x570	3,90
02174.66.40.030	27	4200	80°	4000	595x595x50	570x570	3,90

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com