

Epic-W

Indoor Lighting - Spot Lighting



Colour Options



TECHNICAL INFORMATION

Housing Aluminum Injection
Reflector Anti-Glare White Optics
Paint Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 80°
UGR Value UGR ≤ 19
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL



Power (W) 10-20W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halojen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver Yüksek Verimli Sabit Akım Çıkışlı
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Energy Input Connector
- AC-DC Supply(MBS)
- 1-10V DIM
- CRI > 90
- Different RAL Color Options
- Class-I Protection Class

ASSEMBLY

Installation Type Under Plaster
Mounting Steel Spring
Apparatus

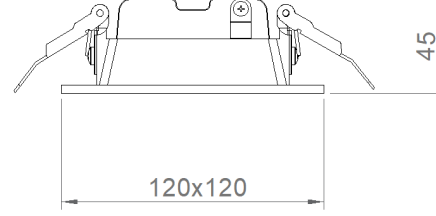

Order Code	W	Lm	Angle	CCT	CRI	WxLxH (mm)	Ceiling Cutting (mm)
05276.11.40.021	20	2270	80°	4000	Ra>80	120x120x45	100x100

