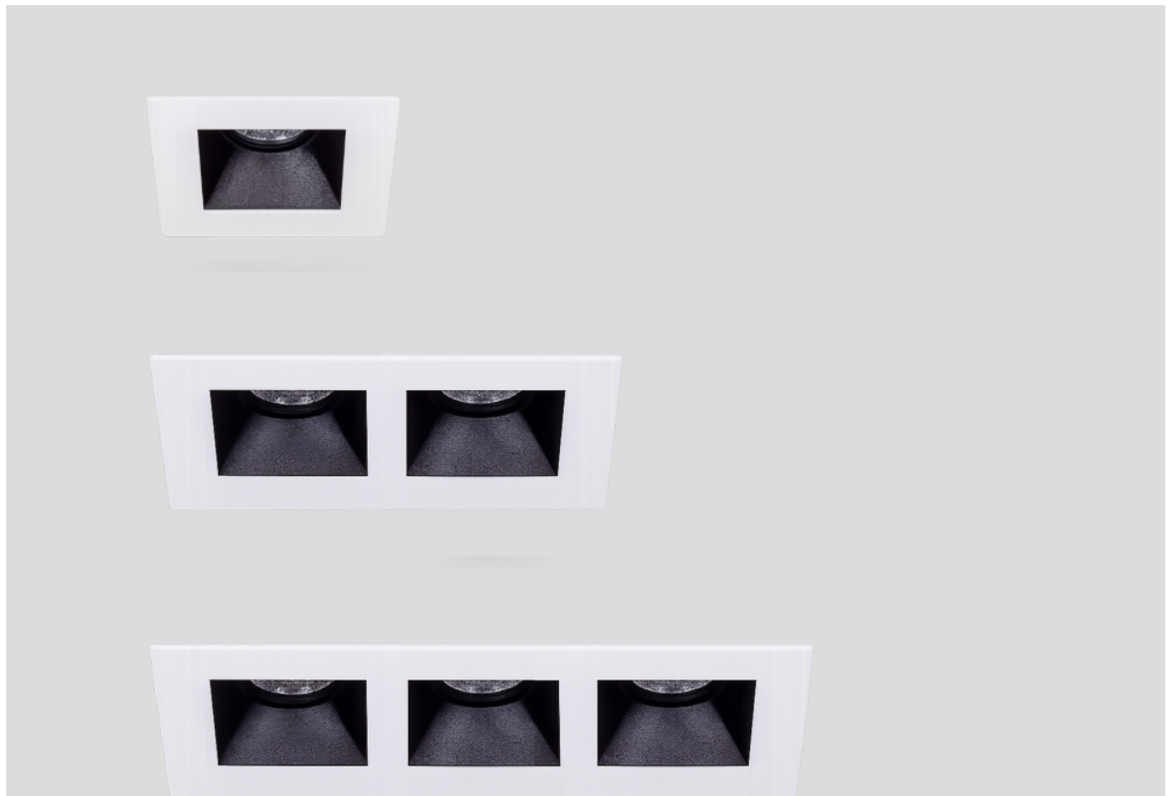


PERLA-K

05481


Modular Square Spot Light Fixture


The PERLA-K Series is a professional recessed spot lighting solution developed for architectural projects, featuring a square form, deep reflector structure, and low-glare optical design.

Available in single, double, and triple module options (K1, K2, and K3), it offers flexible solutions for different lighting needs. Thanks to its modular structure, different light intensities and spatial arrangements can be created while maintaining the same design language.

Available in white and black frame alternatives, the PERLA-K Series adapts to various architectural concepts and can be used in shops, offices, hotels, galleries, social areas, and commercial projects for both general and accent lighting applications.

RAL 9016 RAL 9005 RAL 9006

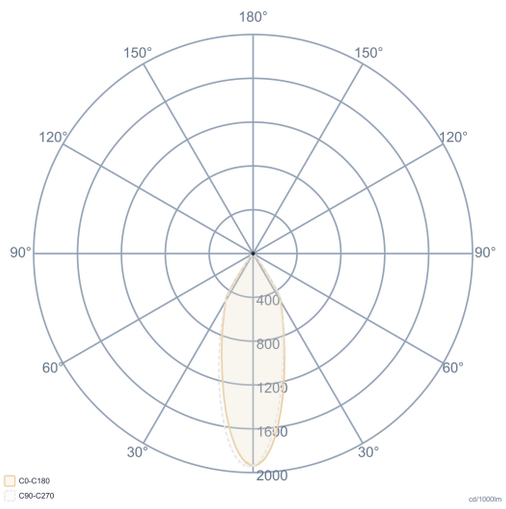

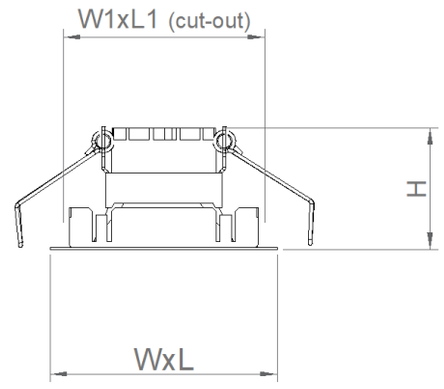

General Information	
Housing	Aluminum Injection
Frame	DKP Metal Sheet
Optics	Polished Reflector
Paint	Electrostatic Powder Coating
Insulation Class	Class II
Product Dimensions [mm]	120/205/308(W)x120(L)x63(H)
Mounting Type	Recessed
Mounting Part	Steel Spring

Electrical Info	
Power	11-33W
Power Factor	>0.95
Light Source	COB LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>60.000 Hour

Lighting Technology	
Light Output Angle	36°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxLxH (mm)	Ceiling Cutting (mm)	Product Type	Kg
05481.11.30.007	11	1020	3000	120x120x63	105x105	-K1	1,00
05481.11.40.007	11	1100	4000	120x120x63	105x105	-K1	1,00
05481.11.30.020	22	2050	3000	205x120x63	190x105	-K2	1,60
05481.11.40.021	22	2150	4000	205x120x63	190x105	-K2	1,60
05481.11.30.022	33	3050	3000	308x120x63	275x105	-K3	2,20
05481.11.40.023	33	3200	4000	308x120x63	275x105	-K3	2,20

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com