


# Draw-M

Indoor Lighting - Industrial Lighting



## Colour Options

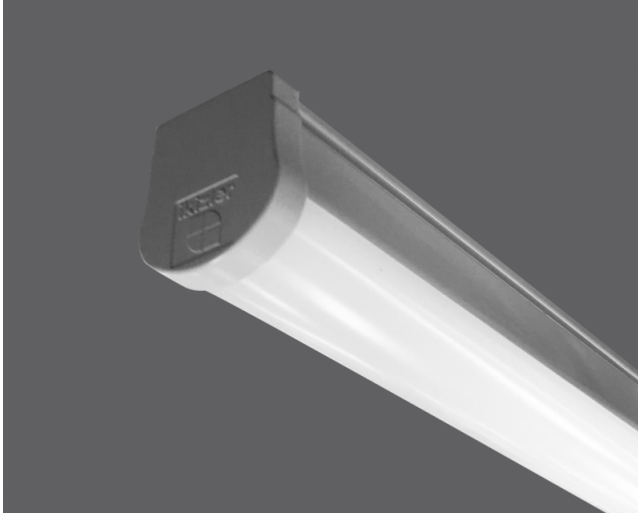

## TECHNICAL INFORMATION

**Housing** CO-EX Extrusion PC Profile  
**Side Cover** PC Injection  
**Diffuser** PC Opal Diffuser  
**Dimensions(mm)** 53(W) x 58(H)

## OPTICAL SPECIFICATIONS

**Optics** Symmetric  
**Light Output Angle** 120°  
**UGR Value** UGR ≤ 25  
**CRI** CRI ≥ 80  
**Color Bin Value** Mc Adams ≤ 3

## ELECTRICAL




**Power (W)** 17-53W  
**Power Factor** >0.95  
**Light Source** SMD Mid Power LED  
**Cabling** Halogen-Free  
**Input Voltage** 220-240V AC / 50-60 Hz  
**LED Driver** High Efficiency Constant Current Output  
**Ambient Temperature** -20°C / +50°C  
**LED Lifetime L80B50** >50.000 Hour

## OPTIONAL

- DALI - 1-10V DIM  
- Emergency Kit (1h/3h) - 2700K ~ 6500K

## ASSEMBLY

**Installation Type** Surface Mounted  
**Mounting Apparatus** Metal Bracket

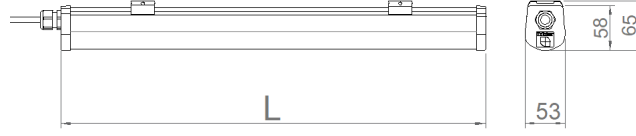

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
07102.05.30.018	17	2100	3000	Ra>80	570	0,53
07102.05.40.019	17	2200	4000	Ra>80	570	0,53
07102.08.30.028	25	3300	3000	Ra>80	870	0,70
07102.08.40.029	25	3400	4000	Ra>80	870	0,70
07102.11.30.037	34	4700	3000	Ra>80	1130	0,85
07102.11.40.039	34	4800	4000	Ra>80	1130	0,85
07102.11.30.047	42	5700	3000	Ra>80	1410	1,00
07102.11.40.048	42	5800	4000	Ra>80	1410	1,00
07102.11.30.055	53	6700	3000	Ra>80	1410	1,00
07102.11.40.058	53	6800	4000	Ra>80	1410	1,00

