


Draw-M

Indoor Lighting - Industrial Lighting



Colour Options

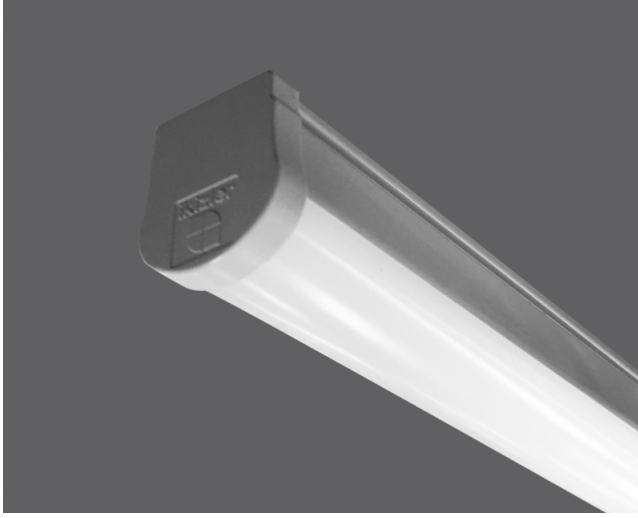

TECHNICAL INFORMATION

Housing CO-EX Extrusion PC Profile
Side Cover PC Injection
Diffuser PC Opal Diffuser
Dimensions(mm) 53(W) x 58(H)

OPTICAL SPECIFICATIONS

Optics Symmetric
Light Output Angle 120°
UGR Value UGR ≤ 25
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL




Power (W) 17-53W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI - 1-10V DIM
- Emergency Kit (1h/3h) - 2700K ~ 6500K

ASSEMBLY

Installation Type Surface Mounted
Mounting Apparatus Metal Bracket

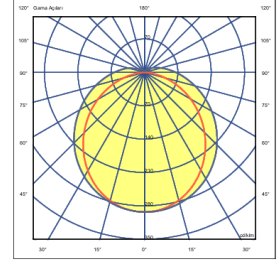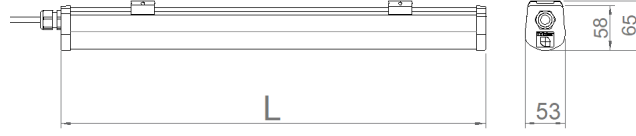

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
07102.05.30.018	17	2100	3000	Ra>80	570	0,53
07102.05.40.019	17	2200	4000	Ra>80	570	0,53
07102.08.30.028	25	3300	3000	Ra>80	870	0,70
07102.08.40.029	25	3400	4000	Ra>80	870	0,70
07102.11.30.037	34	4700	3000	Ra>80	1130	0,85
07102.11.40.039	34	4800	4000	Ra>80	1130	0,85
07102.11.30.047	42	5700	3000	Ra>80	1410	1,00
07102.11.40.048	42	5800	4000	Ra>80	1410	1,00
07102.11.30.055	53	6700	3000	Ra>80	1410	1,00
07102.11.40.058	53	6800	4000	Ra>80	1410	1,00

