


# Draw-M

Indoor Lighting - Industrial Lighting



Colour Options

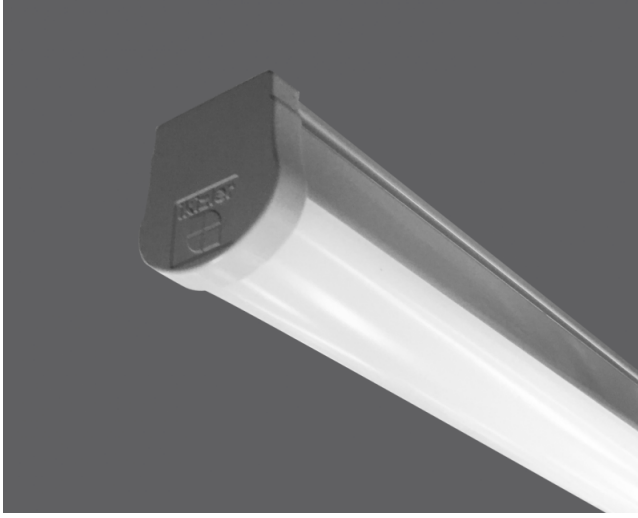

Ral 9006

## TECHNICAL INFORMATION

**Housing** CO-EX Extrusion PC Profile  
**Side Cover** PC Injection  
**Diffuser** PC Opal Diffuser  
**Dimensions(mm)** 53(W) x 58(H)

## OPTICAL SPECIFICATIONS

**Optics** Symmetric  
**Light Output Angle** 120°  
**UGR Value** UGR ≤ 25  
**CRI** CRI ≥ 80  
**Color Bin Value** Mc Adams ≤ 3

## ELECTRICAL

**Power (W)** 17-53W  
**Power Factor** >0.95  
**Light Source** SMD Mid Power LED  
**Cabling** Halogen-Free  
**Input Voltage** 220-240V AC / 50-60 Hz  
**LED Driver** High Efficiency Constant Current Output  
**Ambient Temperature** -20°C / +50°C  
**LED Lifetime L80B50** >50.000 Hour

## OPTIONAL

- DALI - 1-10V DIM  
 - Emergency Kit (1h/3h) - 2700K ~ 6500K

## ASSEMBLY

**Installation Type** Surface Mounted  
**Mounting Apparatus** Metal Bracket






GLOW WIRE  
650°C



IP  
65

IK  
09

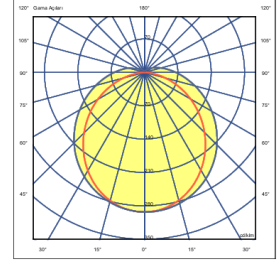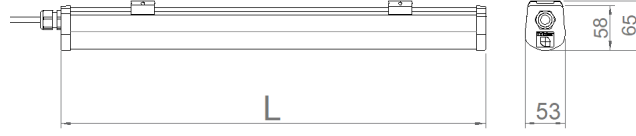

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
07102.11.30.055	53	6700	3000	Ra>80	1410	1,00

