

Icon

Indoor Lighting - Industrial Lighting



Colour Options



Ral 9016

TECHNICAL INFORMATION

Housing UV Additive PC Injection Molding
Diffuser High Light Transmittance Opal Polycarbonate (PC)

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 120°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL



Power (W) 13-25W
Power Factor >0.95
Light Source SMD LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI - 1-10V DIM
- Tunable White - Emergency Lighting Unit
- CRI > 90 - 2700K ~ 6500K
- Different RAL Color Options - Class-II Protection Class
- PIR Sensor - AC-DC Supply(MBS)

ASSEMBLY

Installation Type Surface Mounted
Mounting Apparatus Metal Bracket

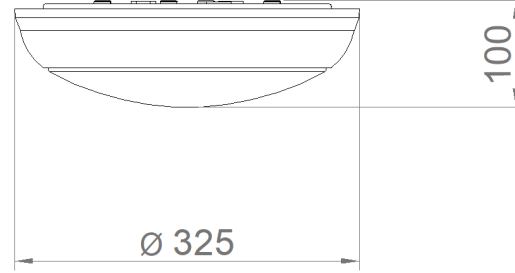

Order Code	W	Lm	CCT	CRI	ØxH (mm)	Kg
06152.34.30.013	13	1403	3000	Ra>80	325x100	1,3
06152.34.40.017	13	1520	4000	Ra>80	325x100	1,3
06152.34.30.018	18	1944	3000	Ra>80	325x100	1,3
06152.34.40.019	18	2310	4000	Ra>80	325x100	1,3
06152.34.30.031	25	3000	3000	Ra>80	325x100	1,3
06152.34.40.032	25	3200	4000	Ra>80	325x100	1,3

