

Icon

Indoor Lighting - Industrial Lighting



Colour Options



Ral 9016

TECHNICAL INFORMATION

Housing UV Additive PC Injection Molding
Diffuser High Light Transmittance Opal Polycarbonate (PC)

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 120°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL




Power (W) 13-25W
Power Factor >0.95
Light Source SMD LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- PIR Sensor
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Class-II Protection Class
- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Surface Mounted
Mounting Apparatus Metal Bracket

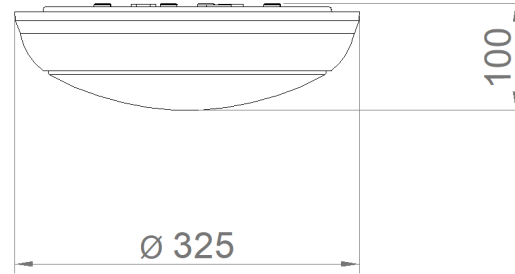

Order Code	W	Lm	CCT	CRI	ØxH (mm)	Kg
06152.34.30.013	13	1403	3000	Ra>80	325x100	1,3

