

Vera

Indoor Lighting - Appliques



Colour Options



TECHNICAL INFORMATION

Housing Electrostatic Powder Coated DKP Sheet
Diffuser Perforated Sheet and Opal Lens
Paint Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 210°
UGR Value UGR ≤ 25
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL



Power (W) 15-22W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +40°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

DALI
Emergency Lighting Unit
CRI > 90
2700K ~ 6500K
Class-II Protection Class
PIR Sensor

ASSEMBLY

Installation Type Surface Mounted

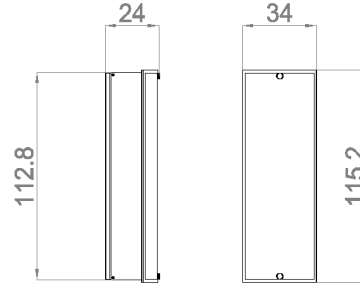

Order Code	W	Lm	CCT	CRI	Kg
06145.14.30.018	22	1720	3000	Ra>80	1,3
06145.14.40.020	22	1870	4000	Ra>80	1,3

