



Vera

Indoor Lighting - Appliques



Colour Options

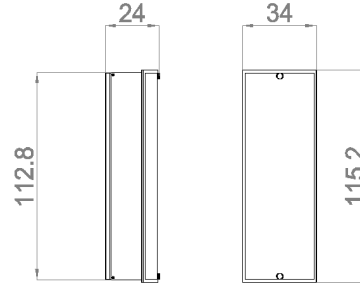

Order Code	W	Lm	CCT	CRI	Kg
06145.14.30.018	22	1720	3000	Ra>80	1,3
06145.14.40.020	22	1870	4000	Ra>80	1,3

TECHNICAL INFORMATION

Housing	Electrostatic Powder Coated DKP Sheet
Diffuser	Perforated Sheet and Opal Lens
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	210°
UGR Value	UGR ≤ 25
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL

Power (W)	15-22W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +40°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

DALI
Emergency Lighting Unit
CRI > 90
2700K ~ 6500K
Class-II Protection Class
PIR Sensor

ASSEMBLY

Installation Type Surface Mounted

