

RAL 7016


FORCE-S


07308

High Performance IP65 High Bay Luminaire

Force-S is a high-bay lighting solution developed for high-performance industrial applications, combining a robust cooling system with a modern design approach. Thanks to its internal cooling channels, it provides effective heat management, contributing to the long lifespan and reliable operation of LED and driver components. A prominent design feature is the openable frame structure, designed for easy maintenance and servicing. The openable cover located in the center provides easy access to the driver and cables. Maintenance operations can be performed more quickly without the need to disassemble the product.

With various lens options, it offers optimum light distribution for various ceiling heights, shelving systems, and production areas. It provides reliable lighting performance in large-volume structures such as warehouses, logistics centers, gyms, and airports.

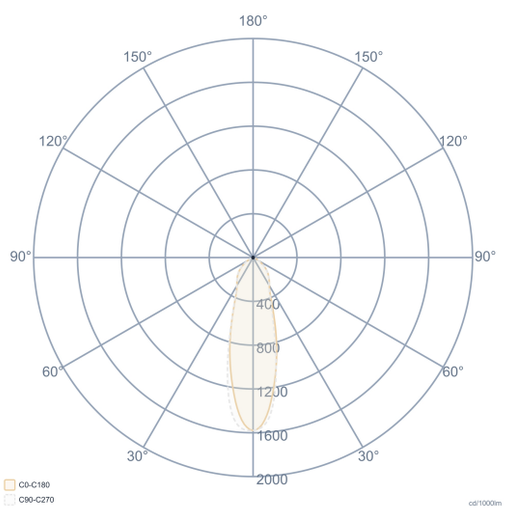

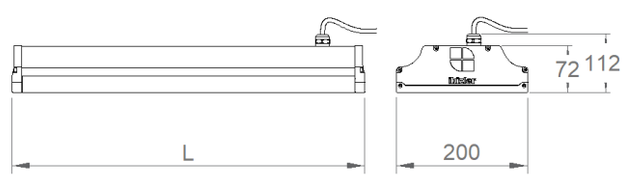

General Information	
Body & Frame	Aluminum Extruded
Side Cover	PC Injection
Optics	UV Stabilized Lens + Heat Resistant Tempered Clear Glass
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	200(W) x L x 72(H)
Mounting Type	Surface
Mounting Part	Steel Concole

Electrical Info	
Power	69-296W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	30°,60°,90°,20x100°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
Emergency Lighting Unit
CRI>90 , 2700K~6500K , Tunable White
Wire Cage
Safety Filmed Glass

Order Code	W	Lm	CCT	L (mm)	Kg
07308.4S.40.100	69	10020	4000	445	3,50
07308.4S.40.150	97	14085	4000	445	3,50
07308.6S.40.202	133	19310	4000	595	5,10
07308.7S.40.226	170	24685	4000	745	6,60
07308.8S.40.327	235	34120	4000	845	7,50
07308.1S.40.240	296	42980	4000	1045	8,20

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com