

Runnel-Lighting Unit

Trunking Lighting Systems - Lighting Units



TECHNICAL INFORMATION

Housing Electrostatic Powder Coated Aluminum Profile
Optics High Light Transmittance Opal Polycarbonate (PC) Diffuser

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 120°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3



ELECTRICAL

Power (W) 35-53W
Power Factor >0.95
Cabling Halogen-Free
Input Voltage 220 -240V AC / 50- 60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +40°C
LED Lifetime L90B10 >100.000 Hours

OPTIONAL

DALI
1-10V DIM
DC Operation Mode
Emergency Kit (1h/3h)
Microwave Sensor
5700K-6500K

ASSEMBLY

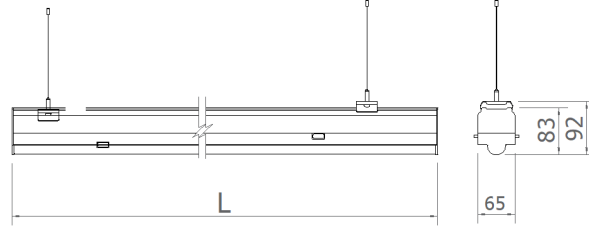

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
07200.11.40.045	35	4500	4000	Ra>80	1133	1,13
07200.14.40.056	44	5600	4000	Ra>80	1413	1,4
07200.16.40.067	53	6700	4000	Ra>80	1693	1,65

