


Draw-MV

Indoor Lighting - Industrial Lighting



Colour Options

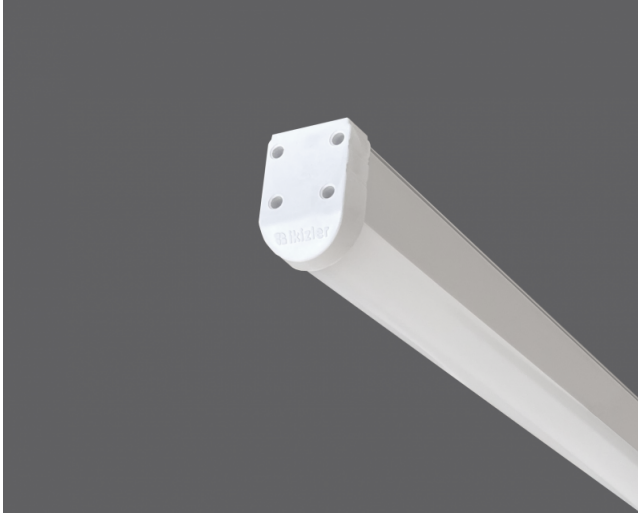

Ral 9006

TECHNICAL INFORMATION

Housing CO-EX Extrusion PC Profile
Side Cover PC Injection
Diffuser PC Opal Diffuser
Dimensions(mm) 50(W) x 71(H)

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 120°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL



Power (W) 18-44W
Power Factor >0.95
Light Source Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI - 1-10V DIM
- Tunable White - Emergency Lighting Unit
- CRI > 90 - 2700K ~ 6500K
- Different RAL Color Options - Plug-in Connector
- Class-II Protection Class - PIR Sensor
- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Surface Mounted
Mounting Apparatus Metal Bracket

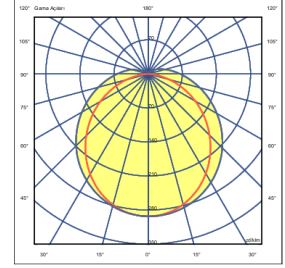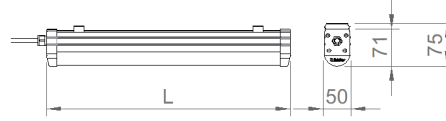

Order Code	W	Lm	CCT	CRI	L (mm)
07108.06.40.021	18	2300	4000	Ra>80	595
07108.09.40.028	21	2730	4000	Ra>80	875
07108.12.40.039	30	3900	4000	Ra>80	1155
07108.14.40.057	44	5720	4000	Ra>80	1430

