


Draw-MV

Indoor Lighting - Industrial Lighting



Colour Options

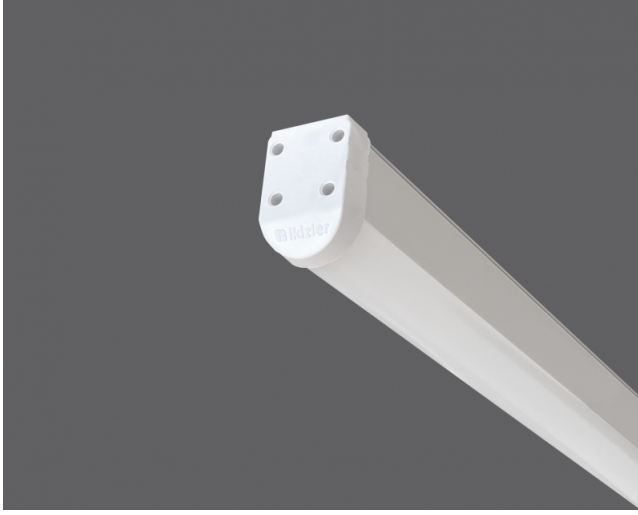

Ral 9006

TECHNICAL INFORMATION

Housing	CO-EX Extrusion PC Profile
Side Cover	PC Injection
Diffuser	PC Opal Diffuser
Dimensions(mm)	50(W) x 71(H)

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	18-44W
Power Factor	>0.95
Light Source	Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Connector
- Class-II Protection Class	- PIR Sensor
- AC-DC Supply(MBS)	

ASSEMBLY

Installation Type	Surface Mounted
Mounting Apparatus	Metal Bracket

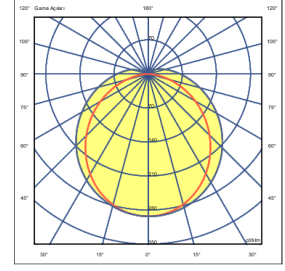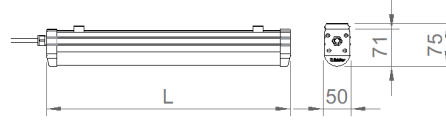

Order Code	W	Lm	CCT	CRI	L (mm)
07108.06.40.021	18	2300	4000	Ra>80	595
07108.09.40.028	21	2730	4000	Ra>80	875
07108.12.40.039	30	3900	4000	Ra>80	1155
07108.14.40.057	44	5720	4000	Ra>80	1430

