

# Coral-L

Outdoor Lighting - Projector



Colour Options



Ral 7016

## TECHNICAL INFORMATION

<b>Housing</b>	Die-cast Aluminum Body
<b>Optics</b>	Acrylic Optical Lens for Projector/Tunnel Lighting
<b>Glass</b>	Tempered, Clear Glass Diffuser
<b>Paint</b>	Electrostatic Powder Paint

## OPTICAL SPECIFICATIONS

<b>Optics</b>	Asymmetrical
<b>Light Output Angle</b>	18°-40°-60°-90°-ASYM
<b>UGR Value</b>	UGR ≤ 22
<b>CRI</b>	CRI ≥ 80
<b>Color Bin Value</b>	Mc Adams ≤ 3

## ELECTRICAL


<b>Power (W)</b>	70-150W
<b>Power Factor</b>	>0.95
<b>Light Source</b>	SMD High Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V AC / 50-60 Hz
<b>LED Driver</b>	High Efficiency Constant Current Output
<b>Ambient Temperature</b>	-20°C / +50°C
<b>LED Lifetime L80B50</b>	>50.000 Hour

## OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Connector
- Class-I Protection Class	- AC-DC Supply(MBS)

## ASSEMBLY

<b>Mounting Apparatus</b>	Metal Console
---------------------------	---------------

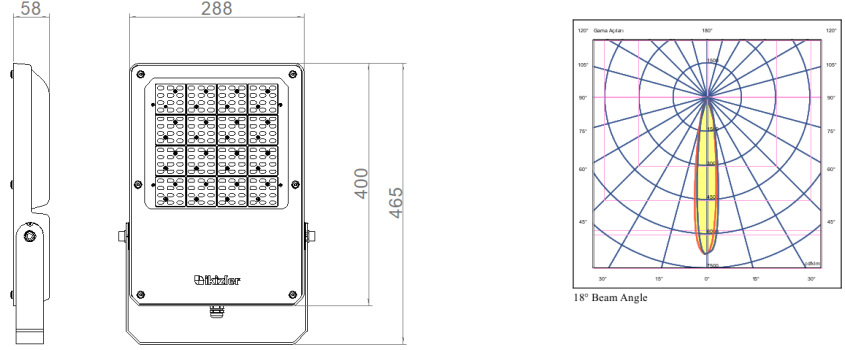

Order Code	W	Lm	CCT	CRI	Angle	Kg
09294.29.40.120.N00 0.AS.7	100	13000	4000	Ra>70	ASM	7,8

