

Coral-L

Outdoor Lighting - Projector



Colour Options



Ral 7016

TECHNICAL INFORMATION

| | |
|----------------|--|
| Housing | Die-cast Aluminum Body |
| Optics | Acrylic Optical Lens for Projector/Tunnel Lighting |
| Glass | Tempered, Clear Glass Diffuser |
| Paint | Electrostatic Powder Paint |

OPTICAL SPECIFICATIONS

| | |
|---------------------------|----------------------|
| Optics | Asymmetrical |
| Light Output Angle | 18°-40°-60°-90°-ASYM |
| UGR Value | UGR ≤ 22 |
| CRI | CRI ≥ 80 |
| Color Bin Value | Mc Adams ≤ 3 |

ELECTRICAL


| | |
|----------------------------|---|
| Power (W) | 70-150W |
| Power Factor | >0.95 |
| Light Source | SMD High Power LED |
| Cabling | Halogen-Free |
| Input Voltage | 220-240V AC / 50-60 Hz |
| LED Driver | High Efficiency Constant Current Output |
| Ambient Temperature | -20°C / +50°C |
| LED Lifetime L80B50 | >50.000 Hour |

OPTIONAL

| | |
|-------------------------------|---------------------------|
| - DALI | - 1-10V DIM |
| - Tunable White | - Emergency Lighting Unit |
| - CRI > 90 | - 2700K ~ 6500K |
| - Different RAL Color Options | - Plug-in Connector |
| - Class-I Protection Class | - AC-DC Supply(MBS) |

ASSEMBLY

| | |
|---------------------------|---------------|
| Mounting Apparatus | Metal Console |
|---------------------------|---------------|

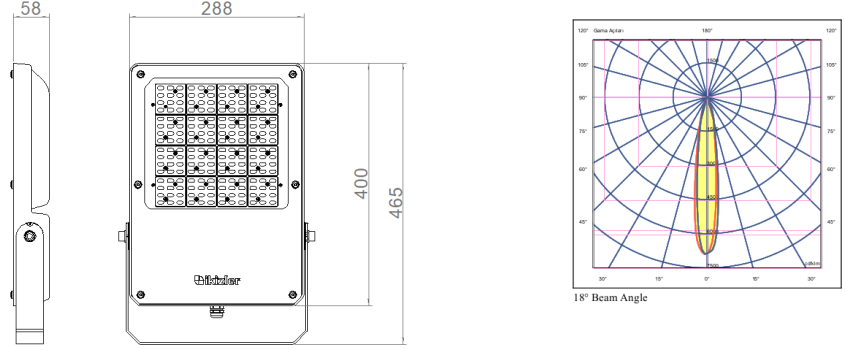

| Order Code | W | Lm | CCT | CRI | Angle | Kg |
|-------------------------------|-----|-------|------|-------|-------|-----|
| 09294.29.40.150.N00 0.AS.7 | 120 | 15600 | 4000 | Ra>70 | ASM | 8,0 |

