

Coral-L

Outdoor Lighting - Projector



Colour Options



TECHNICAL INFORMATION

Housing	Die-cast Aluminum Body
Optics	Acrylic Optical Lens for Projector/Tunnel Lighting
Glass	Tempered, Clear Glass Diffuser
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Asymmetrical
Light Output Angle	18°-40°-60°-90°-ASYM
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL


Power (W)	70-150W
Power Factor	>0.95
Light Source	SMD High Power LED
Cabbling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Connector
- Class-I Protection Class	- AC-DC Supply(MBS)

ASSEMBLY

Mounting Apparatus	Metal Console
---------------------------	---------------

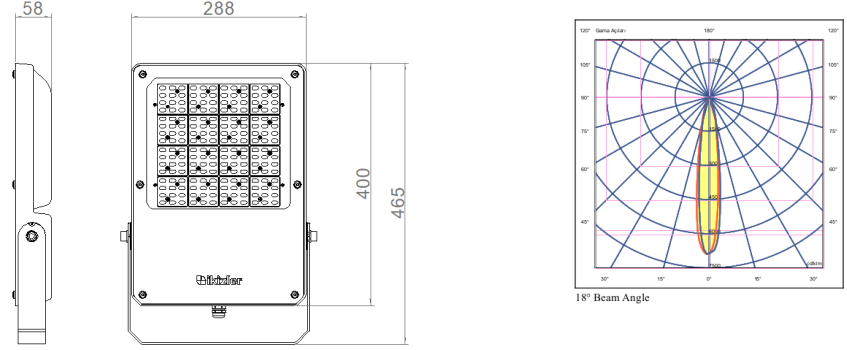

Order Code	W	Lm	CCT	CRI	Angle	Kg
09294.29.40.285	190	28500	4000	Ra>70	30°	8,2
09294.29.40.285	190	28500	4000	Ra>70	60°	8,2
09294.29.40.285	190	28500	4000	Ra>70	90°	8,2

