

DROP-T


05647


Surface Mounted Spot Lighting

Drop-T is designed for surface mounting. Its round form offers stylish accent lighting in modern architectural projects. It provides an aesthetic and practical solution for applications without suspended ceiling spaces, creating a simple and integrated look. Its aluminum body, frame, and metallized optical reflector ensure long-lasting and efficient use. The 36° light output angle allows for effective highlighting of specific areas.

It is an ideal solution for offices, shops, hotels, restaurants, residential projects, and social spaces. Its modern cylindrical design, high-quality materials, and balanced light performance combine decorative appeal with functionality.

RAL 9016 RAL 9005 RAL 9006

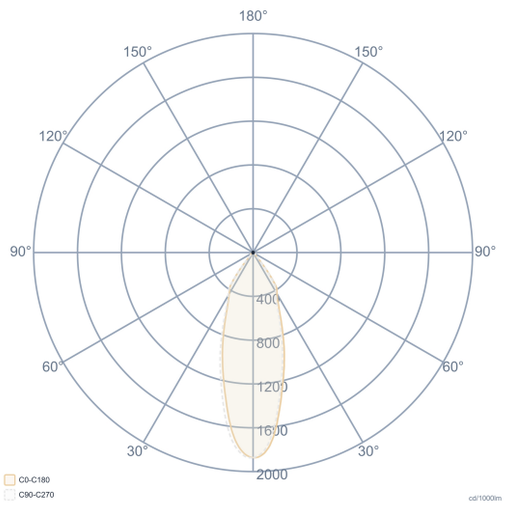



General Information	
Housing	Aluminum Extruded
Frame	Aluminum Injection
Optics	Polished Reflector + Glass
Paint	Electrostatic Powder Coating
Insulation Class	Class I
Product Dimensions [mm]	Ø100x112(H)
Mounting Type	Surface
Mounting Part	Screw Dowel Set

Electrical Info	
Power	11W
Power Factor	>0.95
Light Source	COB LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>60.000 Hour

Lighting Technology	
Light Output Angle	36°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Kit

Order Code	W	Lm	Angle	CCT	ØD x H (mm)	Kg
05647.97.30.009	11	1000	36°	3000	100x112	0,86
05647.97.40.009	11	1100	36°	4000	100x112	0,86

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com