

# TARGET

# 05115


## Recessed Architectural Wallwasher Lighting Fixture


Target is a recessed wallwasher luminaire developed to illuminate wall surfaces homogeneously and controllably. Its slim and linear form highlights architectural details. By directing light evenly across the surface, it adds depth and an aesthetic appearance to the space.

Thanks to its deep reflector structure, it conceals the light source, offering a comfortable lighting experience with its low glare. Its minimalist design, integrated with the ceiling surface thanks to its flush mounting, allows only the illuminated surface to stand out, giving modern architectural projects a simple and elegant character.

It offers solutions for corridors, offices, hotels, shops, museums, galleries, and decorative wall applications. It emphasizes vertical surfaces with its wallwashing effect.

RAL 9016 RAL 9005 RAL 9006

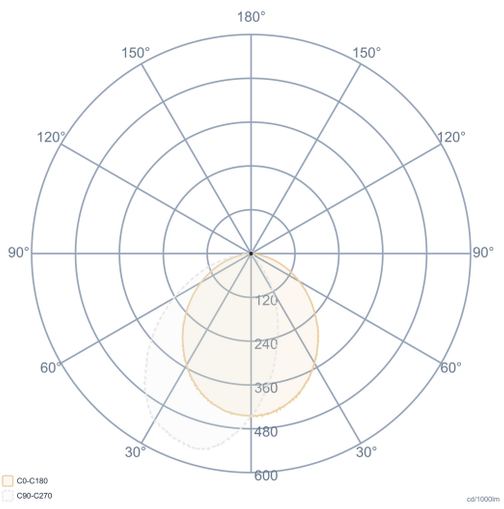

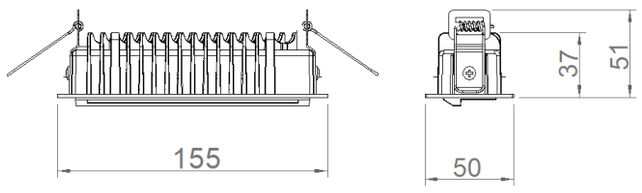
| General Information | |
|---|---|
| **Housing** | Aluminum Injection |
| **Optics** | PC Optical Reflector |
| **Paint** | Electrostatic Powder Paint |
| **Insulation Class** | Class II |
| **Product Dimensions [mm]** | 155(W)x50(L)x51(H) |
| **Mounting Type** | Recessed |
| **Mounting Part** | Steel Spring |

| Electrical Info | |
|---|---|
| **Power** | 9W |
| **Power Factor** | >0.95 |
| **Light Source** | High Power LED |
| **Cabling** | Halojen-Free |
| **Input Voltage** | 220-240V AC / 50-60 Hz |
| **LED Driver** | Constant Current |
| **Ambient Temperature** | -20°C / +50°C |
| **LED Lifetime L70** | >60.000 Hour |

| Lighting Technology | |
|---|---|
| **Light Output Angle** | 83° |
| **UGR Value** | UGR ≤ 22 |
| **CRI [Ra]** | CRI ≥ 80 |
| **Color Bin Value** | Mc Adams ≤ 3 |

| Optional |
|---|
| DALI / 1-10V |
| CRI>90 , 2700K~6500K , Tunable White |
| Emergency Lighting Kit |

| Order Code | W | Lm | Angle | CCT | WxLxH (mm) | Ceiling Cutting (mm) | Kg |
|---|---|---|---|---|---|---|---|
| 05115.88.30.018 | 9 | 540 | 83° | 3000 | 155x50x51 | 145x40 | 0,10 |
| 05115.88.40.018 | 9 | 620 | 83° | 4000 | 155x50x51 | 145x40 | 0,10 |

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.



+90 (216) 397 22 16
info@ikizleraydinlatma.com