



# Waterline 070 IP54

Indoor Lighting - Linear Lighting, Surface Mounted Lighting, Industrial Lighting

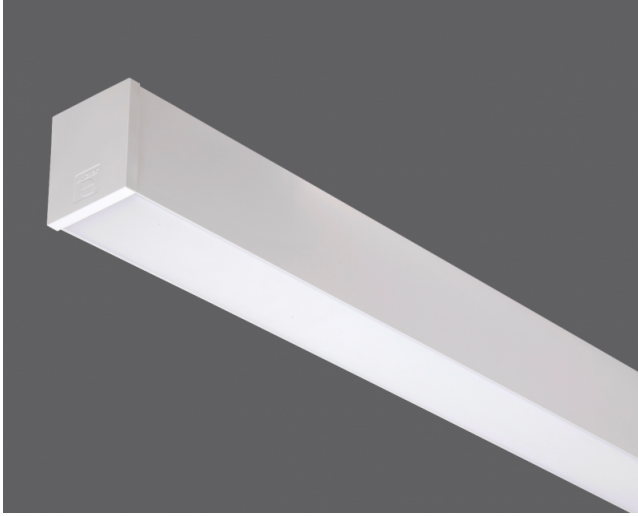

## Colour Options



Ral 9016

Ral 9006

Ral 9005

## TECHNICAL INFORMATION

<b>Housing</b>	Extruded Aluminum Profile
<b>Side Cover</b>	PC Injection
<b>Diffuser</b>	High Light Transmittance Opal
<b>Paint</b>	Electrostatic Powder Paint
<b>Dimensions(mm)</b>	70(W) x 82(H)

## OPTICAL SPECIFICATIONS

<b>Optics</b>	Symmetrical
<b>Light Output Angle</b>	110°
<b>UGR Value</b>	UGR ≤ 22
<b>CRI</b>	CRI ≥ 80
<b>Color Bin Value</b>	Mc Adams ≤ 3

## ELECTRICAL


<b>Power (W)</b>	18-65W
<b>Power Factor</b>	>0.95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabling</b>	Halojen-Free
<b>Input Voltage</b>	220-240V AC / 50-60 Hz
<b>LED Driver</b>	High Efficiency Constant Current Output
<b>Ambient Temperature</b>	-20°C / +50°C
<b>LED Lifetime L80B50</b>	>50.000 Hour

## OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-II Protection Class	- PIR Sensor
- AC-DC Supply(MBS)	

## ASSEMBLY

<b>Installation Type</b>	Surface Mounted, Pendant
<b>Mounting Apparatus</b>	Height Adjustable Steel Wire, Spring Steel

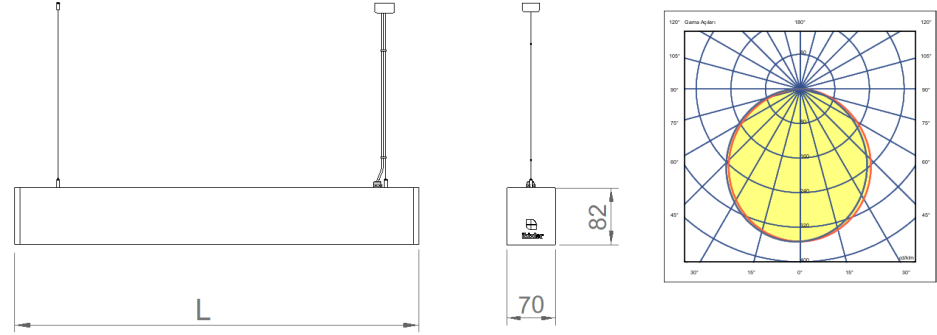

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
01193.78.30.019	18	1900	3000	Ra>80	585	1,4
01193.78.40.020	18	2000	4000	Ra>80	585	1,4
01193.78.30.029	27	2850	3000	Ra>80	865	2,0
01193.78.40.030	27	3000	4000	Ra>80	865	2,0
01193.78.30.039	38	3880	3000	Ra>80	1145	2,6
01193.78.40.041	38	4100	4000	Ra>80	1145	2,6
01193.78.30.049	46	5050	3000	Ra>80	1425	3,2
01193.78.40.052	46	5200	4000	Ra>80	1425	3,2
01193.78.30.059	56	6000	3000	Ra>80	1705	3,8
01193.78.40.062	56	6150	4000	Ra>80	1705	3,8
01193.78.30.069	65	7050	3000	Ra>80	1985	4,5
01193.78.40.072	65	7200	4000	Ra>80	1985	4,5



Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K. Katalogta ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir. İkiizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

