



Lightline - 049 D/E

Direkt/Endirekt

Indoor Lighting - Linear Lighting



Colour Options



Ral 9016



Ral 9006



Ral 9005

TECHNICAL INFORMATION

Housing	Extruded Aluminum Profile
Side Cover	Aluminum Injection
Diffuser	Opal Diffuser with High Light Transmission
Paint	Electrostatic Powder Paint
Dimensions(mm)	48(W) x 90(H)

OPTICAL SPECIFICATIONS

Optics	Direct - Indirect
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	51W-78W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL


- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-II Protection Class	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type	Pendant
Mounting Apparatus	Height Adjustable Steel Wire

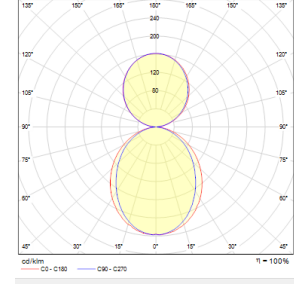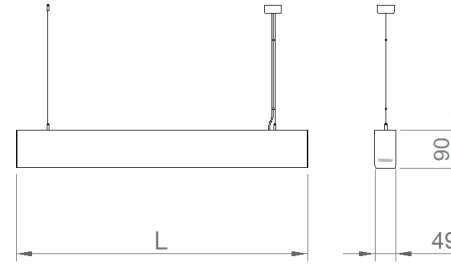

Order Code	W	Lm	CCT	CRI	Direct	Indirect	L (mm)	Burning Pattern	Kg
01180.49.30.055	51	5424	3000	Ra>80	60%	40%	1135	Çift Kontrol	2,6
01180.49.40.057	51	5750	4000	Ra>80	60%	40%	1135	Çift Kontrol	2,6
01180.49.30.070	65	6926	3000	Ra>80	60%	40%	1415	Çift Kontrol	3,2
01180.49.40.072	65	7291	4000	Ra>80	60%	45%	1415	Çift Kontrol	3,2
01180.49.30.085	78	8305	3000	Ra>80	60%	40%	1695	Çift Kontrol	3,9
01180.49.40.087	78	8742	4000	Ra>80	60%	40%	1695	Çift Kontrol	3,9
01180.49.30.055	51	5424	3000	Ra>80	60%	40%	1135	Tek Kontrol	2,6
01180.49.40.057	51	5750	4000	Ra>80	60%	40%	1135	Tek Kontrol	2,6
01180.49.30.070	65	6926	3000	Ra>80	60%	40%	1415	Tek Kontrol	3,2
01180.49.40.072	65	7291	4000	Ra>80	60%	40%	1415	Tek Kontrol	3,2
01180.49.30.085	78	8305	3000	Ra>80	60%	40%	1695	Tek Kontrol	3,9
01180.49.40.087	78	8742	4000	Ra>80	60%	40%	1695	Tek Kontrol	3,9

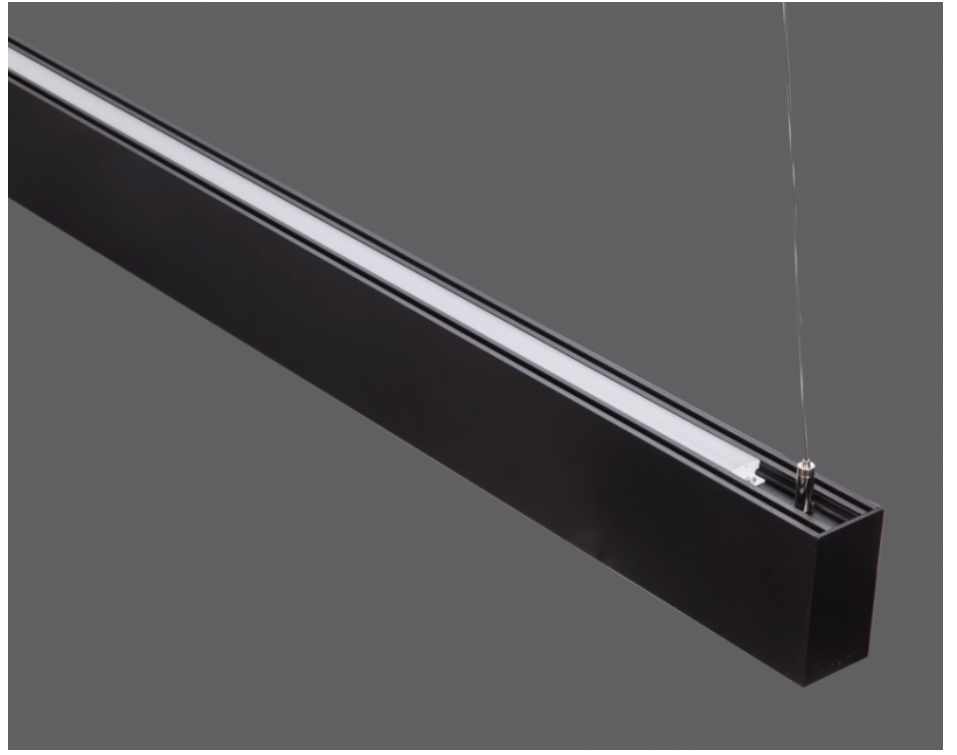

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

Please visit our website for our updated information. www.ikizleraydinlatma.com

+90 (216) 397 22 16
info@ikizleraydinlatma.com

