

Lightline - 049 D/E

Direkt/Endirekt

Indoor Lighting - Pendant Lighting, Linear Lighting



Colour Options



TECHNICAL INFORMATION

| | |
|-----------------------|--|
| Housing | Extruded Aluminum Profile |
| Side Cover | Aluminum Injection |
| Diffuser | Opal Diffuser with High Light Transmission |
| Paint | Electrostatic Powder Paint |
| Dimensions(mm) | 48(W) x 90(H) |

OPTICAL SPECIFICATIONS

| | |
|---------------------------|-------------------|
| Optics | Direct - Indirect |
| Light Output Angle | 120° |
| UGR Value | UGR ≤ 22 |
| CRI | CRI ≥ 80 |
| Color Bin Value | Mc Adams ≤ 3 |

ELECTRICAL

| | |
|----------------------------|---|
| Power (W) | 51W-78W |
| Power Factor | >0.95 |
| Light Source | SMD Mid Power LED |
| Cabling | Halojen-Free |
| Input Voltage | 220-240V AC / 50-60 Hz |
| LED Driver | High Efficiency Constant Current Output |
| Ambient Temperature | -20°C / +50°C |
| LED Lifetime L80B50 | >50.000 Hour |



OPTIONAL

| | |
|-------------------------------|----------------------------------|
| - DALI | - 1-10V DIM |
| - Tunable White | - Emergency Lighting Unit |
| - CRI > 90 | - 2700K ~ 6500K |
| - Different RAL Color Options | - Plug-in Energy Input Connector |
| - Class-II Protection Class | - AC-DC Supply(MBS) |

ASSEMBLY

| | |
|---------------------------|------------------------------|
| Installation Type | Pendant |
| Mounting Apparatus | Height Adjustable Steel Wire |

Veriler tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K. Katalogta ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir. İkiizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

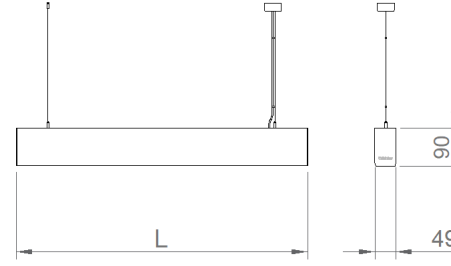

| Order Code | W | Lm | CCT | CRI | Direct | Indirect | L (mm) | Burning Pattern | Kg |
|-----------------|----|------|------|-------|--------|----------|--------|-----------------|-----|
| 01180.49.30.070 | 65 | 6926 | 3000 | Ra>80 | 60% | 40% | 1415 | Çift Kontrol | 3,2 |
| 01180.49.30.070 | 65 | 6926 | 3000 | Ra>80 | 60% | 40% | 1415 | Tek Kontrol | 3,2 |

