

Lightline - 049 D

Direct

Indoor Lighting - Pendant Lighting, Linear Lighting



TECHNICAL INFORMATION

Housing Extruded Aluminum Profile
Side Cover Aluminum Injection
Diffuser Opal Diffuser with High Light Transmission
Paint Electrostatic Powder Paint
Dimensions(mm) 48(W) x 90(H)

OPTICAL SPECIFICATIONS

Optics Direct
Light Output Angle 120°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL


Power (W) 31-45W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halojen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-II Protection Class
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Energy Input Connector
- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Pendant
Mounting Apparatus Height Adjustable Steel Wire

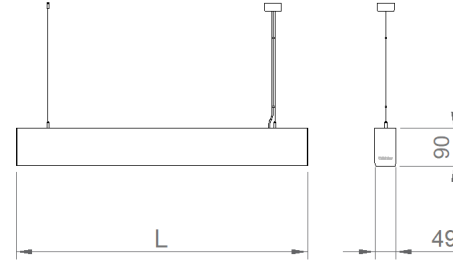

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
01180.49.30.031	31	3000	3000	Ra>80	1135	2,6
01180.49.40.032	31	3240	4000	Ra>80	1135	2,6
01180.49.30.038	37	3760	3000	Ra>80	1415	3,2
01180.49.40.039	37	3960	4000	Ra>80	1415	3,2
01180.49.30.046	45	4575	3000	Ra>80	1695	3,9
01180.49.40.047	45	4815	4000	Ra>80	1695	3,9



Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K. Katalogta ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir. İkiizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

