

# EPIC-T


# 05236


## Low Glare, Maximum Comfort

Epic-T is a surface-mounted lighting solution developed with a focus on visual comfort, featuring a micro-optical structure and low glare. Its deep-cell optical design conceals the light source while providing homogeneous illumination with a wide 80° beam angle. With a UGR≤19 rating and Class II electrical protection, it offers comfortable and safe operation.

It can be applied in various combinations with white or black micro-reflectors and white or black housing options. Its surface-mounted structure makes it an ideal solution for applications without suspended ceiling spaces, while its compact dimensions and four-cell optical design combine a modern look with high performance in offices, shops, hotels, and commercial projects.

RAL 9016 RAL 9005

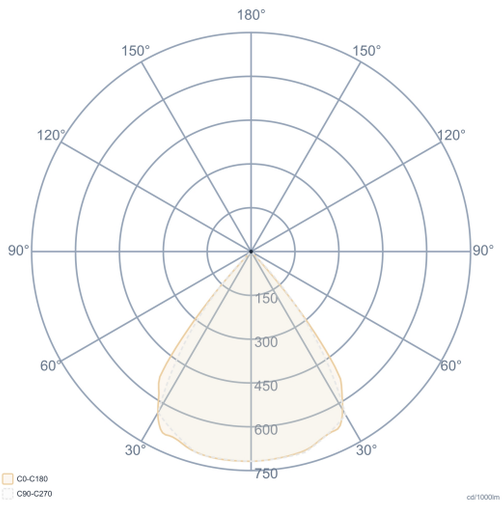


| General Information | |
|---|---|
| **Housing** | DKP Metal Sheet |
| **Frame** | Aluminum Injection |
| **Optics** | Opal Diffuser |
| **Paint** | Electrostatic Powder Coating |
| **Insulation Class** | Class I |
| **Product Dimensions [mm]** | 85(W) x 85(L) x 130(H) |
| **Mounting Type** | Surface |
| **Mounting Part** | Screw Dowel Set |

| Electrical Info | |
|---|---|
| **Power** | 10W |
| **Power Factor** | >0.95 |
| **Light Source** | SMD Mid Power LED |
| **Cabling** | Halojen-Free |
| **Input Voltage** | 220-240V AC / 50-60 Hz |
| **LED Driver** | Constant Current |
| **Ambient Temperature** | -20°C / +50°C |
| **LED Lifetime L70** | >102.000 Hour |

| Lighting Technology | |
|---|---|
| **Light Output Angle** | 80° |
| **UGR Value** | UGR ≤ 19 |
| **CRI [Ra]** | CRI ≥ 80 |
| **Color Bin Value** | Mc Adams ≤ 3 |

| Optional |
|---|
| DALI / 1-10V |
| CRI>90 , 2700K~6500K , Tunable White |
| Emergency Lighting Kit |

| Order Code | W | Lm | Angle | CCT | WxLxH (mm) | Kg |
|---|---|---|---|---|---|---|
| 05236.88.30.009 | 10 | 920 | 80º | 3000 | 85x85x130 | 0,60 |
| 05236.88.40.010 | 10 | 1180 | 80º | 4000 | 85x85x130 | 0,60 |

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.



+90 (216) 397 22 16
info@ikizleraydinlatma.com