

RAL 9016 RAL 9005 RAL 9006


DAYSTAR


05638


Adjustable Track Spot Luminaire

DAYSTAR is a track spotlight developed for professional accent lighting, featuring a track socket design, adjustable housing, and low-glare optical system. Its flexible usage allows for effective lighting in numerous architectural projects, from shops and galleries to offices and exhibition spaces. Its 90° tilt and 350° rotation capability allows for directing light to the desired point. Powered by the track system, its position can be adjusted along the track without requiring changes to the electrical installation. It offers flexibility for varying spatial arrangements and display scenarios. With 15°, 24°, and 38° optical angle options, it provides solutions for both narrow-angle accent lighting and wider area illumination. UGR≤16 enhances visual comfort and offers a superior lighting experience in retail, museums, and display areas.

CE IK02 GLOW WIRE 650°C IP20 RoHS COMPLIANT

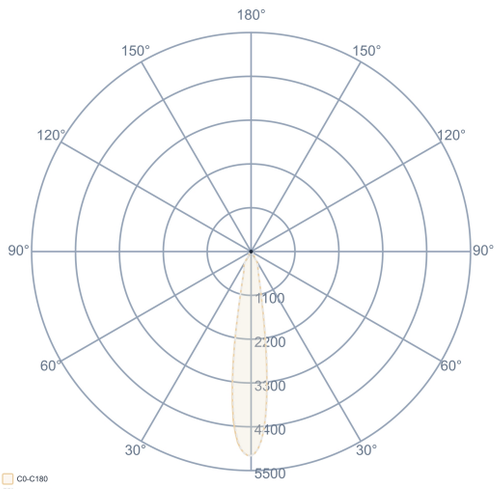





General Information	
Housing	Aluminum Injection
Frame	Aluminum Injection
Optics	Polished Reflector
Paint	Electrostatic Powder Coating
Insulation Class	Class II
Product Dimensions [mm]	Ø80(D)x144(L)x80(H)
Mounting Type	Rail Socket
Mounting Part	Rail Socket

Electrical Info	
Power	17-28W
Power Factor	>0.95
Light Source	COB LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>60.000 Hour

Lighting Technology	
Light Output Angle	15°- 24°- 38°
UGR Value	UGR ≤ 16
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White

Order Code	W	Angle	Lm	CCT	ØD x H (mm)	Kg
05638.80.30.018	17	15º	2000	3000	Ø80x144x80	0,74
05638.80.40.020	17	15º	2150	4000	Ø80x144x80	0,74
05638.80.30.018	17	24º	1980	3000	Ø80x144x80	0,74
05638.80.40.020	17	24º	2125	4000	Ø80x144x80	0,74
05638.80.30.018	17	38º	1950	3000	Ø80x144x80	0,74
05638.80.40.020	17	38º	2100	4000	Ø80x144x80	0,74
05638.80.30.028	28	15º	3015	3000	Ø80x144x80	0,74
05638.80.40.030	28	15º	3250	4000	Ø80x144x80	0,74
05638.80.30.028	28	24º	2980	3000	Ø80x144x80	0,74
05638.80.40.030	28	24º	3220	4000	Ø80x144x80	0,74
05638.80.30.028	28	38º	2950	3000	Ø80x144x80	0,74
05638.80.40.030	28	38º	3160	4000	Ø80x144x80	0,74

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

Please visit our website for our updated information. www.ikizleraydinlatma.com

+90 (216) 397 22 16
info@ikizleraydinlatma.com