

CONTIN


07200

The Contin Lighting Unit is designed for continuous lighting systems. Its electrostatically powder-coated aluminum housing and optical lens structure offer long-lasting, durable, and energy-efficient use. With 60° and 90° symmetrical, 40°x100° symmetrical, and 2x25° asymmetrical optical angle options, it provides light direction tailored to the application area. Its flexible optical structure helps to effectively deliver light to the required areas while increasing energy efficiency.

With its compact dimensions, it can be easily used in continuous line lighting, corridors, warehouses, logistics centers, and chain stores. Its modular structure and different power options offer project-specific solutions, providing a high-performance and reliable lighting experience.



RAL 9016 RAL 9005

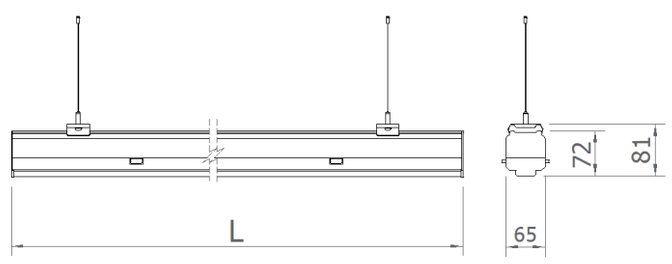

General Information	
Housing	Electrostatic Powder Coated Aluminum
Optics	Optical Lens
Side Cover	PC Injection
Insulation Class	Class I
Product Dimensions [mm]	65(W)x27(H)

Electrical Info	
Power	48-72W
Power Factor	>0.95
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +40°C
LED Lifetime L70	>102.000 Hours

Lighting Technology	
Light Output Angle	60°Sym / 90°Sym / 40°x100°Sym / 2x25°Asym
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Kit (1h/3h)

Order Code	W	Lm	CCT	Angle	L (mm)	Kg
07200.11.40.075/90	48	7500	4000	90°	1133	1,13
07200.14.40.093/90	60	9300	4000	90°	1413	1,40
07200.16.40.112/90	72	11200	4000	90°	1693	1,65
07200.11.40.075/AS	48	7500	4000	25° Asym	1133	1,13
07200.14.40.093/AS	60	9300	4000	25° Asym	1413	1,40
07200.16.40.112/AS	72	11200	4000	25° Asym	1693	1,65

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com