

Contin Lighting Units

Continuous Lighting System - Contin



Colour Options



Ral 9016

TECHNICAL INFORMATION

Housing Electrostatic Powder Coated Aluminum Profile
Optics High Light Transmittance Optical Lens

OPTICAL SPECIFICATIONS

Light Distribution Symmetrical / Asymmetrical
Light Output Angle 90°x100°Sym / 2x25°Asym / 40°x100°Sym
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL



Power (W) 48-72W
Power Factor >0.95
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +40°C
LED Lifetime L90B10 >100.000 Hours

OPTIONAL

DALI
1-10V DIM
DC Operation Mode
Emergency Kit (1h/3h)
Microwave Sensor
5700K-6500K

ASSEMBLY

Installation Type Surface Mounted, Pendant

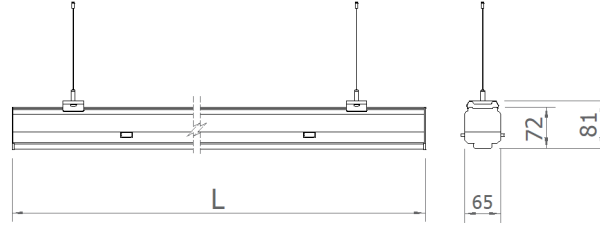

Order Code	W	Lm	CCT	Angle	L (mm)	Kg
------------	---	----	-----	-------	--------	----

