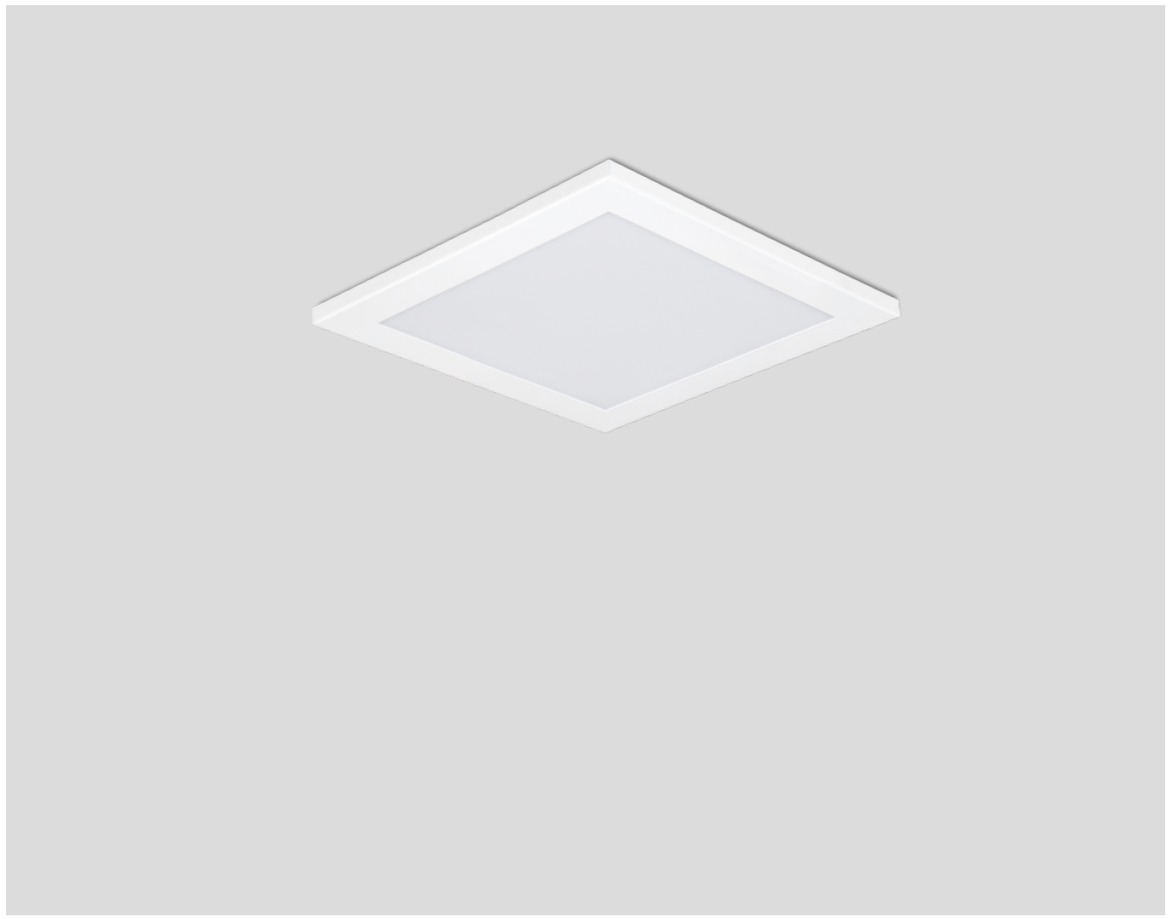


# CANVAS

# 05247


## Recessed Square Downlight Fixture


The CANVAS Series, with its metal sheet body structure and square form, is a stylish and functional recessed downlight solution developed for modern architectural projects. Thanks to its simple design and homogeneous light distribution, it provides balanced lighting to the space while offering an aesthetic appearance that integrates seamlessly with the ceiling surface.

It adapts to project-specific lighting scenarios with various power, color temperature, and control options. Its Class II electrical protection structure offers high safety standards.

It easily adapts to different application environments such as offices, shops, hotels, educational buildings, and commercial areas.

RAL 9016 RAL 9005 RAL 9006

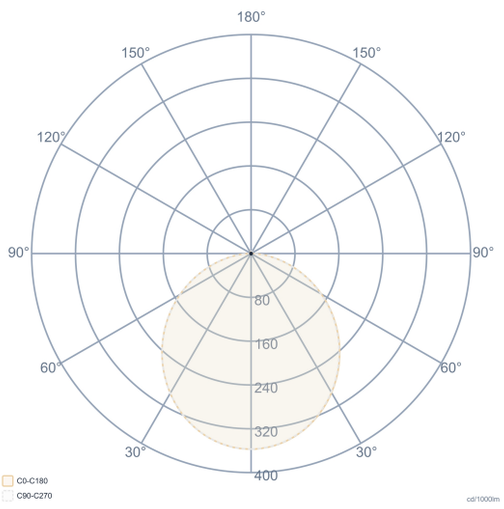

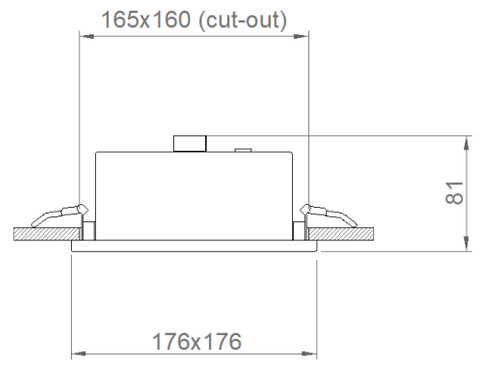
| General Information | |
|---|---|
| **Meterial** | DKP Metal Sheet |
| **Frame** | Metal Sheet |
| **Optics** | Opal Diffuser |
| **Paint** | Electrostatic Powder Paint |
| **Insulation Class** | Class II |
| **Product Dimensions [mm]** | 175(W) x 175(L) x 81(H) |
| **Mounting Type** | Recessed |
| **Mounting Part** | Steel Spring |

| Electrical Info | |
|---|---|
| **Power** | 13-18W |
| **Power Factor** | >0.95 |
| **Light Source** | SMD Mid Power LED |
| **Cabling** | Halogen-Free |
| **Input Voltage** | 220-240V AC / 50-60 Hz |
| **LED Driver** | Constant Current |
| **Ambient Temperature** | -20°C / +50°C |
| **LED Lifetime L70** | >102.000 Hour |

| Lighting Technology | |
|---|---|
| **Light Output Angle** | 110° |
| **UGR Value** | UGR ≤ 22 |
| **CRI [Ra]** | CRI ≥ 80 |
| **Color Bin Value** | Mc Adams ≤ 3 |

| Optional |
|---|
| DALI / 1-10V |
| CRI>90 , 2700K~6500K , Tunable White |
| Emergency Lighting Unit |

| Order Code | W | Lm | CCT | WxLxH (mm) | Ceiling Cutting (mm) | Kg |
|---|---|---|---|---|---|---|
| 05247.22.30.015 | 13 | 1120 | 3000 | 175x175x81 | 165x160 | 0,60 |
| 05247.22.40.016 | 13 | 1200 | 4000 | 175x175x81 | 165x160 | 0,60 |
| 05247.22.30.021 | 18 | 1450 | 3000 | 175x175x81 | 165x160 | 0,60 |
| 05247.22.40.022 | 18 | 1520 | 4000 | 175x175x81 | 165x160 | 0,60 |

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.



+90 (216) 397 22 16
info@ikizleraydinlatma.com