

Canvas-T

Indoor Lighting - Downlight Lighting



Colour Options



TECHNICAL INFORMATION

Body & Frame Metal Sheet
Diffuser Opal with High Light Transmittance
Paint Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 110°
UGR Value UGR ≤ 25
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL



Power (W) 13-18W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- PIR Sensor
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Class-I Protection Class
- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Surface Mounted

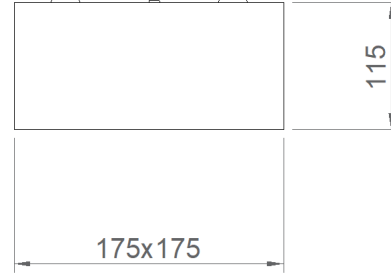

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
05250.22.30.015	13	1120	3000	Ra>80	175x175x115	1,1
05250.22.40.016	13	1200	4000	Ra>80	175x175x115	1,1
05250.22.30.021	18	1520	3000	Ra>80	175x175x115	1,1
05250.22.40.022	18	1600	4000	Ra>80	175x175x115	1,1

