

Fedora-R

Acoustic Lighting - STILL Series



Colour Options



TECHNICAL INFORMATION

| | |
|-----------------|----------------------------|
| Housing | Extruded Aluminum Profile |
| Housing | Acoustic Felt |
| Diffuser | Permeable Opal Diffuser |
| Paint | Electrostatic Powder Paint |

OPTICAL SPECIFICATIONS

| | |
|---------------------------|--------------|
| Optics | Symmetrical |
| Light Output Angle | 120° |
| UGR Value | UGR ≤ 22 |
| CRI | CR ≥ 80 |
| Color Bin Value | Mc Adams ≤ 3 |

ELECTRICAL



| | |
|----------------------------|---|
| Power (W) | 30W |
| Power Factor | >0.95 |
| Light Source | SMD Mid Power LED |
| Cabling | Halogen-Free |
| Input Voltage | 220-240V AC / 50-60 Hz |
| LED Driver | High Efficiency Constant Current Output |
| Ambient Temperature | -20°C / +50°C |
| LED Lifetime L80B50 | >50.000 Hour |

OPTIONAL

| | |
|-------------------------------|---------------------------|
| - DALI | - 1-10V DIM |
| - Tunable White | - Emergency Lighting Unit |
| - CRI > 90 | - 2700K ~ 6500K |
| - Different RAL Color Options | - Plug-in Connector |
| - Class-I Protection Class | - AC-DC Supply(MBS) |

ASSEMBLY

Installation Type Surface Mounted, Pendant

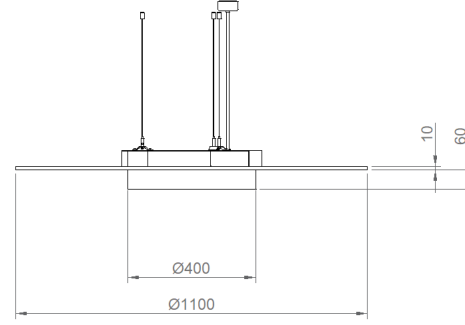

| Order Code | W | Lm | CCT | CRI | L (mm) |
|-----------------|----|------|------|-------|---------|
| 03170.11.30.029 | 30 | 2900 | 3000 | Ra>80 | 1100x60 |
| 03170.11.40.029 | 30 | 2900 | 4000 | Ra>80 | 1100x60 |

