


# Skate-D

Acoustic Lighting - STILL Series



Colour Options

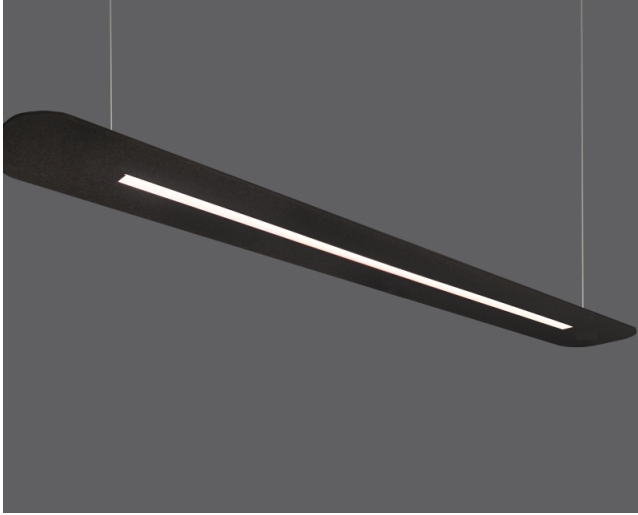

Ral 9016



Ral 9006



Ral 9005

## TECHNICAL INFORMATION

**Housing** Extruded Aluminum Profile  
**Diffuser** High Light Transmittance Opal  
**Paint** Electrostatic Powder Paint

## OPTICAL SPECIFICATIONS

**Optics** Symmetrical  
**Light Output Angle** 120°  
**UGR Value** UGR ≤ 22  
**CRI** CRI ≥ 80  
**Color Bin Value** Mc Adams ≤ 3

## ELECTRICAL



**Power (W)** 42W  
**Power Factor** >0.95  
**Light Source** SMD Mid Power LED  
**Cabling** Halojen-Free  
**Input Voltage** 220-240V AC / 50-60 Hz  
**LED Driver** High Efficiency Constant Current Output  
**Ambient Temperature** -20°C / +50°C  
**LED Lifetime L80B50** >50.000 Hour

## OPTIONAL

- DALI - 1-10V DIM  
- Tunable White - Emergency Lighting Unit  
- CRI > 90 - 2700K ~ 6500K  
- Different RAL Color Options - Plug-in Energy Input Connector  
- Class-II Protection Class - AC-DC Supply(MBS)

## ASSEMBLY

**Installation Type** Surface Mounted, Pendant

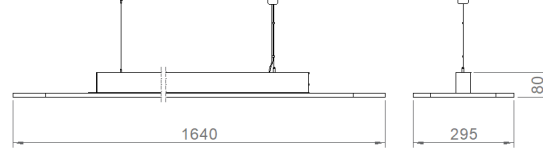

Order Code	W	Lm	CCT	CRI	WxHxL (mm)	Kg
01183.21.30.038.N00 0.S	42	3800	3000	Ra>80	295x1640x80	4,6
01183.21.40.039.N00 0.S	42	3900	4000	Ra>80	295x1640x80	4,6

