

SKATE-D


01183


Homogeneous Light, Acoustic Comfort

Skate-D combines a high-transmittance opal diffuser with an acoustic felt panel in a single product, offering a homogeneous and uninterrupted lighting experience. Thanks to its wide light distribution, it creates soft and balanced lighting in the space, while the acoustic felt panel reduces echo, increasing sound comfort in working environments.

It adapts to architecture thanks to different felt colors and customizable panel sizes. It provides both acoustic regulation and aesthetically pleasing and comfortable lighting solutions in a single product for open offices, meeting rooms, training areas, and social living spaces.

RAL 9005 RAL 9006

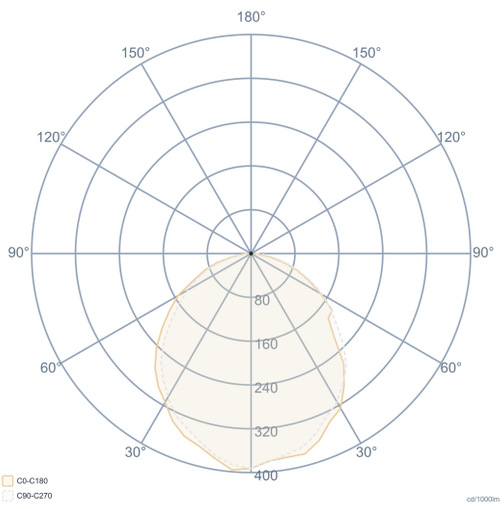

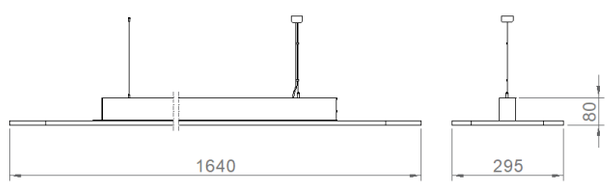

General Information	
Housing	Aluminum Extruded
Panel	Acoustic Felt
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	295(W)x1640(L)x80(H)
Mounting Type	Pendant
Mounting Part	Height Adjustable Steel Wire

Electrical Info	
Power	42W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxHxL (mm)	Kg
01183.21.30.038.N000.S	42	3800	3000	295x1640x80	4,60
01183.21.40.039.N000.S	42	3900	4000	295x1640x80	4,60

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com