


Skate-RM

Acoustic Lighting - STILL Series



Colour Options

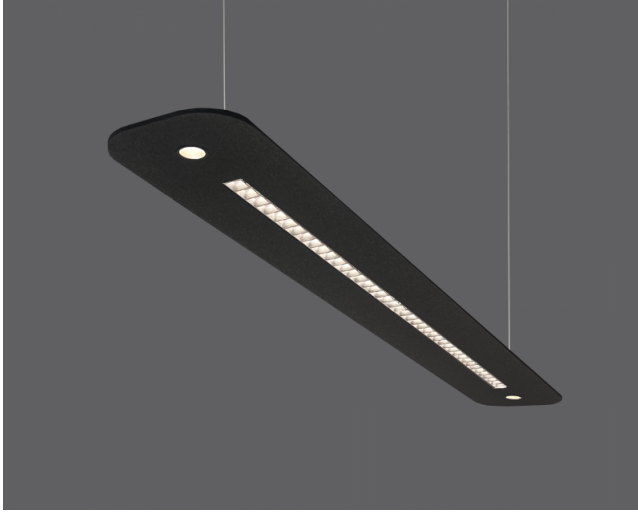

TECHNICAL INFORMATION

Housing Extruded Aluminum Profile
Reflector Glare Controlled Optics
Paint Electrostatic Powder Painted

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 80°
UGR Value UGR ≤ 16
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL





Power (W) 30W+12W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halojen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-II Protection Class
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Energy Input Connector
- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Surface Mounted, Pendant

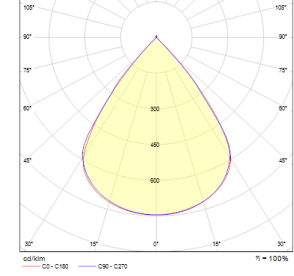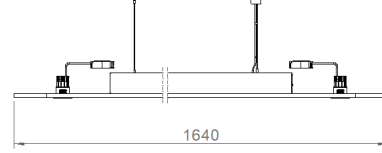

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
01183.21.30.044.N00 0.S	30W+12W	4400	3000	Ra>80	295x1640x80	5
01183.21.40.046.N00 0.S	30W+12W	4600	4000	Ra>80	295x1640x80	5

