

RAL 7016


HIGHLINE IP65


07309

Highbay Luminaire with Linear Lens

Highline, with its double aluminum profile structure and linear optical system, is designed for industrial areas with ceiling heights of 4-12m. Its slim linear design gives industrial spaces a modern and architectural look. The outer casing and the inner cooling profile carrying the electrical components are designed independently, simplifying maintenance and servicing and significantly reducing operating costs throughout the luminaire's lifespan.

The linear optical lens system ensures controlled and homogeneous light distribution along corridors, production lines, and shelving systems. With 90°x100°, 40°x100° symmetrical, and 2x25° asymmetrical optical options, it is suitable for different ceiling heights and application scenarios. This allows light to be directed only to the areas where it is needed, achieving maximum efficiency.

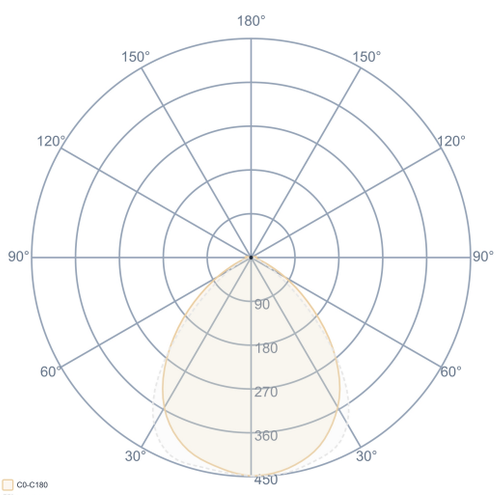

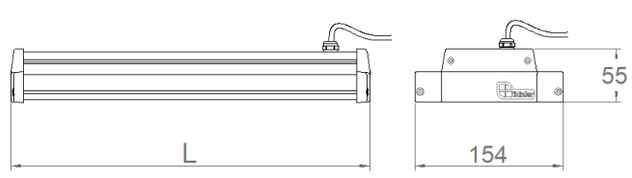

General Information	
Housing	Aluminum Extrusion
Diffuser	Tempered Clear Glass + PMMA Optical Lens
Side Cover	PC Injection + Silicone Gasket
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	154(W) x L x 55(H)
Mounting Type	Surface and Pendant
Mounting Part	Steel Console

Electrical Info	
Power	75-150W
Power Factor	>0.95
Light Source	Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +45°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	90°x100° ,40°x100°, 2x25°
UGR Value	UGR ≤ 25
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
Emergency Kit (1h/3h)
CRI>90 , 2700K~6500K , Tunable White
Safety Filmed Glass
Protective Cage

Order Code	W	Lm	CCT	L (mm)	Kg
07309.06.40.100	75	10090	4000K	600	3,00
07309.07.40.146	112	15065	4000K	740	3,50
07309.12.40.200	150	20180	4000K	1165	4,00

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com