




RAL 7016

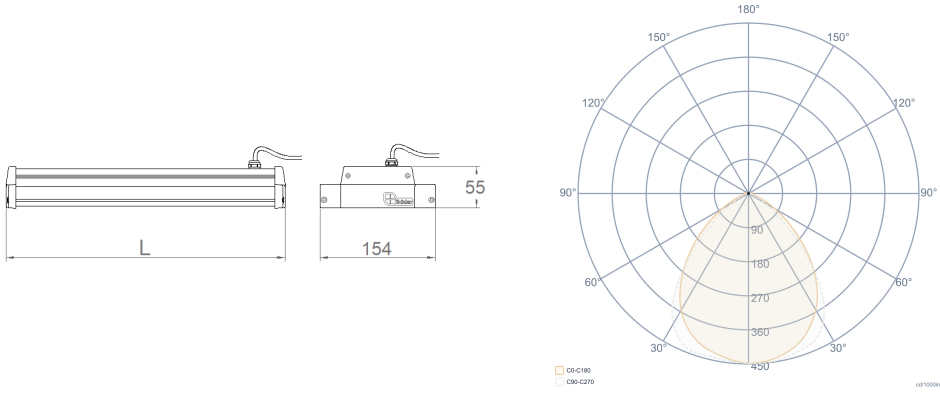

HIGHLINE IP65

07309

Highbay Luminaire with Linear Lens

Highline, with its double aluminum profile structure and linear optical system, is designed for industrial areas with ceiling heights of 4-12m. Its slim linear design gives industrial spaces a modern and architectural look. The outer casing and the inner cooling profile carrying the electrical components are designed independently, simplifying maintenance and servicing and significantly reducing operating costs throughout the luminaire's lifespan.

The linear optical lens system ensures controlled and homogeneous light distribution along corridors, production lines, and shelving systems. With 90°x100°, 40°x100° symmetrical, and 2x25° asymmetrical optical options, it is suitable for different ceiling heights and application scenarios. This allows light to be directed only to the areas where it is needed, achieving maximum efficiency.



General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extrusion	Power	75-150W	Light Output Angle	90°x100°, 40°x100°, 2x25°
Diffuser	Tempered Clear Glass + PMMA Optical Lens	Power Factor	>0.95	UGR Value	UGR ≤ 25
Side Cover	PC Injection + Silicone Gasket	Light Source	Mid Power LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V Emergency Kit (1h/3h) CRI>90 , 2700K~6500K , Tunable White Safety Filmed Glass Protective Cage	
Product Dimensions [mm]	154(W) x L x 55(H)	LED Driver	Constant Current		
Mounting Type	Surface and Pendant	Ambient Temperature	-20°C / +45°C		
Mounting Part	Steel Console	LED Lifetime L70	>50.000 Hour		
Order Code	W	Lm	CCT	L (mm)	Kg
07309.07.40.146	112	15065	4000K	740	3,50