

Highline

Indoor Lighting - Industrial Lighting



Colour Options



Ral 7016

TECHNICAL INFORMATION

Housing Electrostatic Powder Coated Aluminum Profile
Diffuser Tempered Clear Glass + PMMA Optical Lens

OPTICAL SPECIFICATIONS

Optics Symmetrical / Asymmetrical
Light Output Angle (SYM)90°x100°, (SYM)40°x100°, (ASYM)2x25°
UGR Value UGR ≤ 25
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL



Power (W) 75-150W
Power Factor >0.95
Light Source Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +45°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- DC Operation Mode
- Microwave Sensor
- Safety Filmed Glass
- Internal Power Input Connector
- 1-10V DIM
- Emergency Kit (1h/3h)
- 5700K-6500K
- Protective Cage for Sports Fields

ASSEMBLY

Installation Type Surface Mounted, Pendant

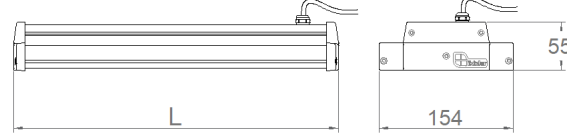

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
07309.08.40.140	110	15000	4000	Ra>80	885	3,5

