

# Waterline-080 IP65

Indoor Lighting - Linear Lighting, Surface Mounted Lighting, Industrial Lighting



## Colour Options



Ral 9016



Ral 9006



Ral 9005

## TECHNICAL INFORMATION

<b>Housing</b>	Extruded Aluminum Profile
<b>Side Cover</b>	Aluminum Injection
<b>Diffuser</b>	High Light Transmittance Opal
<b>Paint</b>	Electrostatic Powder Paint
<b>Dimensions(mm)</b>	80(W) x 92(H)

## OPTICAL SPECIFICATIONS

<b>Optics</b>	Symmetrical
<b>Light Output Angle</b>	110°
<b>UGR Value</b>	UGR ≤ 22
<b>CRI</b>	CRI ≥ 80
<b>Color Bin Value</b>	Mc Adams ≤ 3

## ELECTRICAL



<b>Power (W)</b>	18-65W
<b>Power Factor</b>	>0.95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V AC / 50-60 Hz
<b>LED Driver</b>	High Efficiency Constant Current Output
<b>Ambient Temperature</b>	-20°C / +50°C
<b>LED Lifetime L80B50</b>	>50.000 Saat

## OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-II Protection Class	- PIR Sensor
- AC-DC Supply(MBS)	

## ASSEMBLY

<b>Installation Type</b>	Surface Mounted, Pendant
<b>Mounting Apparatus</b>	Height Adjustable Steel Wire

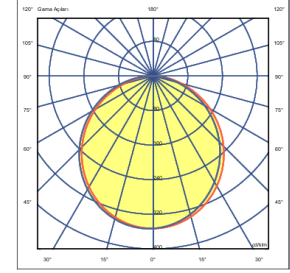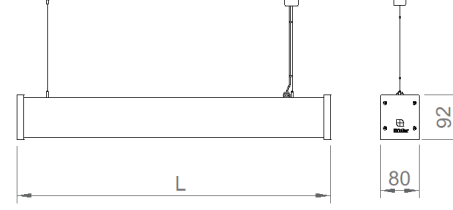

Order Code	W	Lm	CCT	CRI	WxLxH (mm)
01194.89.30.019	18	1900	3000	Ra>80	80x92x595
01194.89.40.020	18	2000	4000	Ra>80	80x92x595
01194.89.30.029	27	2900	3000	Ra>80	80x92x875
01194.89.40.030	27	3000	4000	Ra>80	80x92x875
01194.89.30.039	38	3900	3000	Ra>80	80x92x1155
01194.89.40.041	38	4100	4000	Ra>80	80x92x1155
01194.89.30.049	46	5000	3000	Ra>80	80x92x1435
01194.89.40.052	46	5200	4000	Ra>80	80x92x1435
01194.89.30.059	56	6000	3000	Ra>80	80x92x1715
01194.89.40.062	56	6200	4000	Ra>80	80x92x1715
01194.89.30.069	65	7000	3000	Ra>80	80x92x1995
01194.89.40.072	65	7200	4000	Ra>80	80x92x1995

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K. Katalogta ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir. İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

