

Waterline-080 IP65

Indoor Lighting - Pendant Lighting, Linear Lighting, Surface Mounted Lighting, Industrial Lighting



Colour Options



Ral 9016



Ral 9006



Ral 9005

TECHNICAL INFORMATION

Housing	Extruded Aluminum Profile
Side Cover	Aluminum Injection
Diffuser	High Light Transmittance Opal
Paint	Electrostatic Powder Paint
Dimensions(mm)	80(W) x 92(H)

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	110°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	18-65W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Saat

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-II Protection Class	- PIR Sensor
- AC-DC Supply(MBS)	

ASSEMBLY

Installation Type	Surface Mounted, Pendant
Mounting Apparatus	Height Adjustable Steel Wire

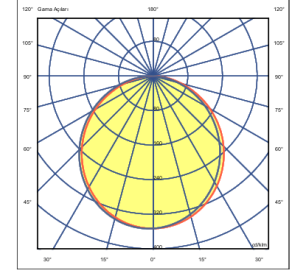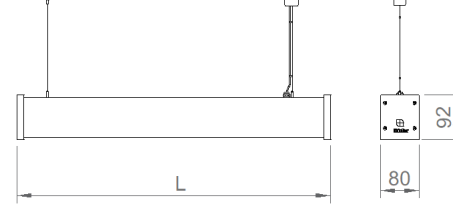

Order Code	W	Lm	CCT	CRI	WxLxH (mm)
01194.89.30.019	18	1900	3000	Ra>80	80x92x595
01194.89.40.020	18	2000	4000	Ra>80	80x92x595
01194.89.30.029	27	2900	3000	Ra>80	80x92x875
01194.89.40.030	27	3000	4000	Ra>80	80x92x875
01194.89.30.039	38	3900	3000	Ra>80	80x92x1155
01194.89.40.041	38	4100	4000	Ra>80	80x92x1155
01194.89.30.049	46	5000	3000	Ra>80	80x92x1435
01194.89.40.052	46	5200	4000	Ra>80	80x92x1435
01194.89.30.059	56	6000	3000	Ra>80	80x92x1715
01194.89.40.062	56	6200	4000	Ra>80	80x92x1715
01194.89.30.069	65	7000	3000	Ra>80	80x92x1995
01194.89.40.072	65	7200	4000	Ra>80	80x92x1995

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K. Katalogta ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir. İkiizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

