


Watercourse - IP66

Indoor Lighting - Industrial Lighting



Colour Options

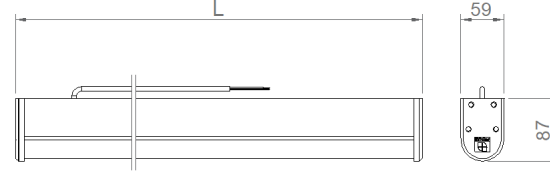

Ral 9016



Ral 9006



Ral 9005

TECHNICAL INFORMATION

Housing	Extrusion Aluminum Profile
Side Cover	Aluminum Injection
Diffuser	High Light Transmittance Opal
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	110°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL

Power (W)	26W-65W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-II Protection Class	- PIR Sensor
- AC-DC Supply(MBS)	

ASSEMBLY

Installation Type	Surface Mounted, Pendant
Mounting Apparatus	Height Adjustable Steel Wire

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
07109.05.30.034	26	3400	3000	Ra>80	595	2
07109.05.40.037	26	3700	4000	Ra>80	595	2
07109.08.30.050	39	5000	3000	Ra>80	875	2,6
07109.08.40.055	39	5500	4000	Ra>80	875	2,6
07109.11.30.065	52	6500	3000	Ra>80	1155	3,2
07109.11.40.072	52	7200	4000	Ra>80	1155	3,2
07109.14.30.082	65	8200	3000	Ra>80	1435	4
07109.14.40.091	65	9100	4000	Ra>80	1435	4

