

WATERCOURSE IP66


07109


Practical Installation - Maximum Protection

Watercourse stands out with its high IP66 protection, robust construction, and zero-gap surface mounting. Thanks to a special internal channel on the back of the housing, the mounting spring and power cable are concealed inside. This eliminates any mounting gap between the ceiling and the luminaire, ensuring a perfect fit and clean appearance. The seal sections on the opal diffuser, combined with the grooves in the housing, create a watertight and dustproof seal. The silicone seals used on the side metal covers ensure long-lasting performance in harsh environmental conditions.

It offers a reliable lighting solution for parking lots, technical areas, production facilities, warehouses, corridors, industrial plants, and semi-open areas exposed to external elements.

RAL 9016 RAL 9005 RAL 9006

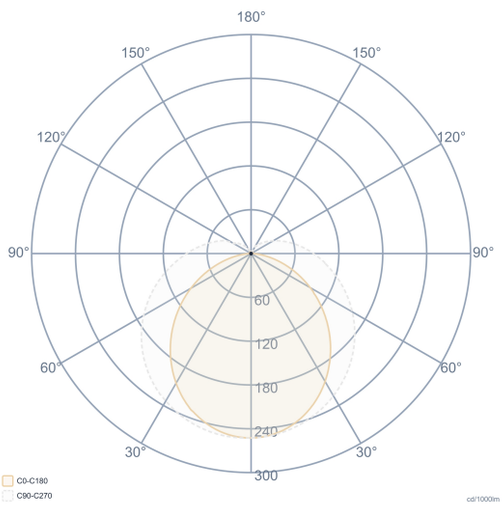

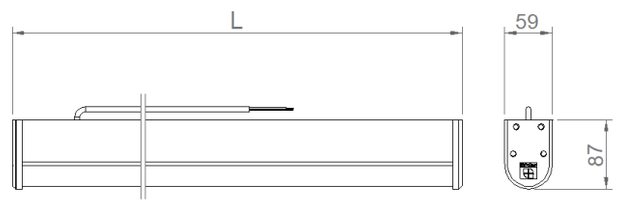

General Information	
Housing	Aluminum Extrusion
Side Cover	Aluminum Injection
Diffuser	Silicone Sealed Extruded PC
Gasket	Transparent Silicone
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	59(W)
Mounting Type	Surface and Pendant
Mounting Part	Stainless Spring Steel

Electrical Info	
Power	26W-65W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	110°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	L (mm)	Kg
07109.05.30.034	26	3400	3000	595	2,00
07109.05.40.037	26	3700	4000	595	2,00
07109.08.30.050	39	5000	3000	875	2,60
07109.08.40.055	39	5500	4000	875	2,60
07109.11.30.065	52	6500	3000	1155	3,20
07109.11.40.072	52	7200	4000	1155	3,20
07109.14.30.082	65	8200	3000	1435	4,00
07109.14.40.091	65	9100	4000	1435	4,00

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com