

DRAW IP65

07105


Lightweight and Durable Waterproof Lighting


Draw IP65 combines aesthetic appeal with a high level of protection thanks to its slim and compact design. Its CO-EX extruded PC housing offers a lightweight, durable, and corrosion-resistant structure.

The product features an aluminum inner profile where the LED modules and driver are mounted. This structure provides heat management, increasing LED lifespan and supporting mechanical strength. Maintenance and servicing are easily performed thanks to the screw-on side cover system.

It is reliable and long-lasting for corridors, technical areas, parking lots, production areas, warehouses, and humid environments. Its IP65 protection level provides high resistance to dust and moisture.

RAL 9006

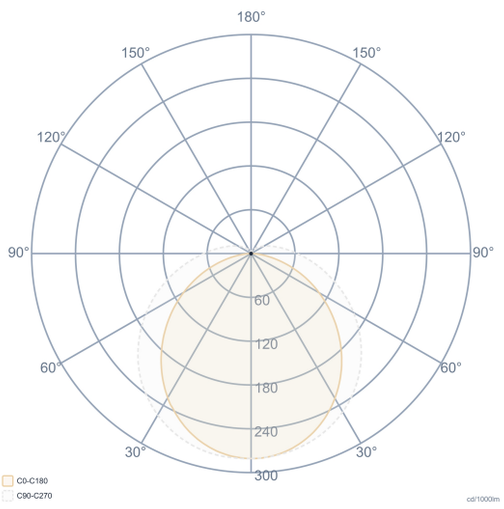

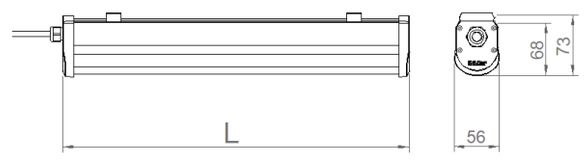

General Information	
Housing	CO-EX PC Extrusion
Side Cover	PC Injection
Inner plate	Aluminum Extrusion (LED Assembly)
Gasket	Transparent Silicone (inside the side cover)
Insulation Class	Class I
Product Dimensions [mm]	56(W) x 68(H)
Mounting Type	Surface and Pendant
Mounting Part	Stainless Spring Steel

Electrical Info	
Power	17-51W
Power Factor	>0.95
Light Source	Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	L (mm)
07105.06.30.021	17	2100	3000	580
07105.06.40.022	17	2200	4000	580
07105.08.30.033	25	3300	3000	860
07105.08.40.034	25	3400	4000	860
07105.12.30.046	34	4600	3000	1140
07105.12.40.047	34	4700	4000	1140
07105.14.30.057	42	5700	3000	1420
07105.14.40.058	42	5800	4000	1420
07105.14.30.067	51	6700	3000	1420
07105.14.40.068	51	6800	4000	1420

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com